



# INSTRUMENT AIR FILTER REGULATOR

Compact, Stainless Steel Models, Cost-Effective

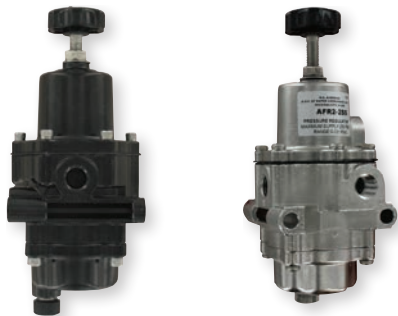

**SERIES AFR2** Air Filter Regulator provides clean air pressure to pneumatic controllers, valve positioners, air cylinders and other equipment. Self-relieving regulator is equipped with a 40 micron filter housed in a dripwell with gage port.

MODEL CHART		
Model	Range	Body
AFR2-1	0 to 60 psi (0 to 4 bar)	Aluminum
AFR2-2	0 to 121 psi (0 to 8 bar)	Aluminum
AFR2-1SS	0 to 60 psi (0 to 4 bar)	Stainless steel
AFR2-2SS	0 to 121 psi (0 to 8 bar)	Stainless steel

## SPECIFICATIONS

**Service:** Air only.

**Wetted Materials:** Body: Aluminum or SS; Filter: Polyethylene; Diaphragm and valve seat plug: Nitrile elastomer.

**Max. Supply Pressure:** 250 psi (17.2 bar).

**Temperature Limits:** -4 to 158°F (-20 to 70°C).

**Minimum Filtering Size:** 5 microns.

**Process Connection:** 1/4" NPT.

**Weight:** 1.7 lb (0.6 kg), SS models: 3.0 lb (1.4 kg).