




2/2-Way Solenoid Control Valve

- Made for custom engineered applications
- DN 0.8 ... 4 mm
- 1/8", 1/4" sub-base or custom engineered armature

Type 2863 is an extremely compact solenoid control valve and is available with an orifice up to 4mm. It is based on the standard version of Type 2873 (see datasheet). It is used as an actuator in closed control loops (pressure, flow, temperature, etc.). Compared with the standard version, the valve is essentially of simpler construction and assembly and testing procedures are optimized, easing high volume series production with shorter delivery times. Please follow the instructions for a customised design on page 4 of this datasheet.

Circuit function A



direct acting 2-way
solenoid control valve,
normally closed

Valve control takes place through a PWM signal¹⁾. The duty cycle of the PWM signal determines the coil current and hence the position of the plunger.

The Bürkert control electronics Type 8605 (see relevant datasheet) converts an analog signal to a reference value corresponding to the valve type PWM signal and provides additional functions such as temperature compensation (coil heating), ramp function and the adjustment of min. and max. duty cycle/coil current for the control range.

Please note the sizing comments for such a control valve on page 2.


Technical Data - Valve	
Body material	Brass, stainless steel
Seal material	FKM, EPDM on request
Medium	Neutral gases, liquids on request
Pressure range	0 ... -16 bar ²⁾
Medium temperature	-10 ... +90 °C
Ambient temperature	max. +55 °C
Power supply	24 V DC
Max. current	420mA (at 24V-hold)
Power consumption	9 W
Duty cycle	100% continuously rated
PWM control frequency	400 Hz
Port connection	Sub-base, G 1/8, G 1/4, NPT 1/8, NPT 1/4, further on request
Electrical connection	Cable plug Type 2508, Form A industrial standard Item no. 008 376
Installation	As required, preferably with actuator in upright position
Typical control data³⁾	Hysteresis < 5% Repeatability < 1.0 % of F.S. Sensitivity < 1.0 % of F.S. Span 1:25
Protection class - valve	IP65

¹⁾ PWM pulse width modulation

²⁾ Pressure data [bar]: Measured as overpressure to the atmospheric pressure, orifice further depends on nominal pressure

³⁾ Characteristic data of control behaviour depends on process conditions

Characteristics of a proportional valve

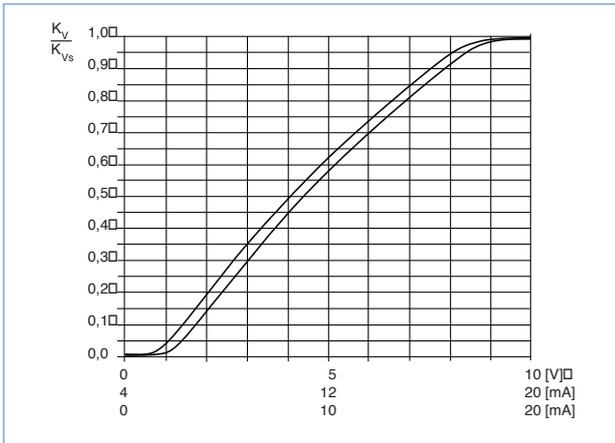

Advice for valve sizing

In continuous flow applications, the choice of appropriate valve size is much more important than with on/off valves. The optimum size should be selected such that the resulting flow in the system is not unnecessarily reduced by the valve. However, a sufficient part of the pressure drop should be taken across the valve even when it is fully opened.

Recommended value: $\Delta p_{\text{valve}} > 25\%$ of total pressure drop within the system

Otherwise, the ideal, linear valve curve characteristic is changed.

For that reason take advantage of Bürkert competent engineering services during the planning phase!

Determination of the k_v value

Pressure drop	k_v value for liquids [m³/h]	k_v value for gases [m³/h]
Subcritical $p_2 > \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{514} \sqrt{\frac{T_1 \rho_N}{p_2 \rho}}$
Supercritical $p_2 < \frac{p_1}{2}$	$= Q \sqrt{\frac{\rho}{1000 \Delta p}}$	$= \frac{Q_N}{257 p_1} \sqrt{T_1 \rho_N}$


- k_v Flow coefficient [m³/h]⁴⁾
- Q_N Standard flow rate [m³/h]⁵⁾
- p_1 Inlet pressure [bar]⁶⁾
- p_2 Outlet pressure [bar]⁶⁾
- Δp Differential pressure $p_1 - p_2$ [bar]
- ρ Density [kg/m³]
- ρ_N Standard density [kg/m³]
- T_1 Medium temperature [(273+t)K]

- ⁴⁾ measured for water, $\Delta p = 1$ bar, via the device
- ⁵⁾ Standard conditions at 1.013 bar^{abs)} and 0 °C (273K)
- ⁶⁾ Absolute pressure

Dimensions [mm]


Valve body version	Threaded port			
	G 1/4	NPT 1/4	G 1/8	NPT 1/8
A				
B	12	10	8	7

Ordering chart

Circuit function	Orifice [mm]	Port connection	k_{vs} value water [m ³ /h] ⁷⁾	Q_{90} value [l/min] ⁸⁾	Nominal pressure [bar] ⁹⁾	Item no. brass	Item no. stainless steel
 A	0,8	G 1/8	0,018	19	16	275 060	275 063
	1,2	G 1/8	0,040	43	12	249 140	275 064
	1,5	G 1/8	0,060	65	10	249 141	275 065
	2,0	G 1/8	0,100	108	8	254 182	275 066
		G 1/4	0,100	108	8	255 699	276 517
	2,5	G 1/4	0,150	162	5	275 061	275 067
	3,0	G 1/4	0,220	237	3,5	275 062	275 068
	4,0	G 1/4	0,320	345	2	251 831	255 700

Ordering chart - variants with ATEX / IECEx

ATEX - II 2 G EEx m II T4 and T5
IECEx - Ex mb e IIC T4, T5 Gb

Circuit function	Orifice [mm]	Port connection ⁷⁾	k_{vs} value water [m ³ /h] ⁸⁾	Q_{90} value [l/min] ⁹⁾	Nominal pressure [bar] ¹⁰⁾	Item no. brass	Item no. stainless steel
 A	0,8	G 1/8	0,018	19	16	274 893	on request
	1,2	G 1/8	0,040	43	12	274 894	on request
	1,5	G 1/8	0,060	65	10	274 895	on request
	2,0	G 1/8	0,100	108	8	274 896	on request
		G 1/4	0,150	162	5	274 897	on request
	2,5	G 1/4	0,150	162	5	274 897	on request
	3,0	G 1/4	0,220	237	3,5	274 898	on request
	4,0	G 1/4	0,320	345	2	274 899	on request

⁷⁾ Port connection: NPT and sub-base on request
⁸⁾ k_{vs} value: Flow rate value for water, measured at +20 °C and 1 bar pressure differential over a fully opened valve.
⁹⁾ Q_{90} value: Flow rate for air with inlet pressure of 6 bar, 1 bar pressure differential and +20 °C.
¹⁰⁾ Pressure data [bar]: Overpressure with respect to atmospheric pressure.

Please use page 4 of this datasheet to inquire about your individual requirements

i Further versions on request

 **Materials**
Other seal materials
Valve body with special armature

 **Analytical**
Oxygen version
Parts oil-, fat- and silicon free

 **Coil**
Other coil power
Specific, power setting for lower pressure
Other operating voltages
Coil with flying leads

 **Valve armature**
Special valve orifice

Note

You can fill out the fields directly in the PDF file before printing out the form.

Design data for custom engineered solenoid control valves

▶ Please fill out this form and send to your local Bürkert Sales Centre* with your inquiry or order

Company	Contact person
Customer No	Department
Address	Tel./Fax
Postcode/Town	E-mail

<input type="checkbox"/> = Mandatory fields	<input type="text"/> Quantity	<input type="text"/> Requested delivery date
Process data		
<input type="checkbox"/> Medium	<input type="text"/>	
<input type="checkbox"/> State of medium	<input type="checkbox"/> liquid	<input type="checkbox"/> gaseous
<input type="checkbox"/> Medium temperature	<input type="text"/> °C	
<input type="checkbox"/> Maximum flow rate	$Q_{nom} =$ <input type="text"/>	Unit: <input type="text"/>
<input type="checkbox"/> Minimum flow rate	$Q_{min} =$ <input type="text"/>	Unit: <input type="text"/>
<input type="checkbox"/> Inlet pressure at nominal operation	$p_1 =$ <input type="text"/>	barg
<input type="checkbox"/> Outlet pressure at nominal operation	$p_2 =$ <input type="text"/>	barg
<input type="checkbox"/> Max. inlet pressure (nominal pressure)	$p_{1max} =$ <input type="text"/>	barg
<input type="checkbox"/> Ambient temperature	<input type="text"/> °C	
Additional specifications		
<input type="checkbox"/> Body material	<input type="checkbox"/> Brass	<input type="checkbox"/> Stainless steel <input type="checkbox"/> other <input type="text"/>
<input type="checkbox"/> Seal material	<input type="checkbox"/> FKM	<input type="checkbox"/> other <input type="text"/>

Note Please state all pressure values as **overpressures with respect to atmospheric pressure** [barg].

DTS 1000173851 EN Version: D Status: RL (released | freigegeben | valide) printed: 24.10.2016

To find your nearest Bürkert facility, click on the orange →

www.burkert.com

In case of special application conditions, please consult for advice.

Subject to alteration.
© Christian Bürkert GmbH & Co. KG

1504/2_EU-en_00895218