

2604

MODEL




Override control supplement Specification Sheet

- Reduces time to setpoint
- Selective output control
- “Soft” operating limits
- Thermal head control
- Delta T control

One of the advanced control functions provided by the 2604 Series controller is Override (Select Output) control. Override control allows a secondary control loop to override the main control output in order to prevent an undesirable operating condition. The override function can be configured to operate in either minimum, maximum or select mode. Override control is available with analogue, time proportioning and ON/OFF control outputs, it is not available to be used with Valve Position outputs.

A typical example, shown below can be implemented in a heat treatment furnace with one thermocouple attached to the workpiece (main), and another situated close to the heating elements (override). Control of the furnace during the heating up period is regulated by the override (element) thermocouple which provides a safeguard against overheating. Control of the furnace will switch over to the workpiece (main) thermocouple at a defined point, usually when the temperature is near its target setpoint. The exact point of switchover is determined automatically by the controller, and will be dependent on the selected PID terms.

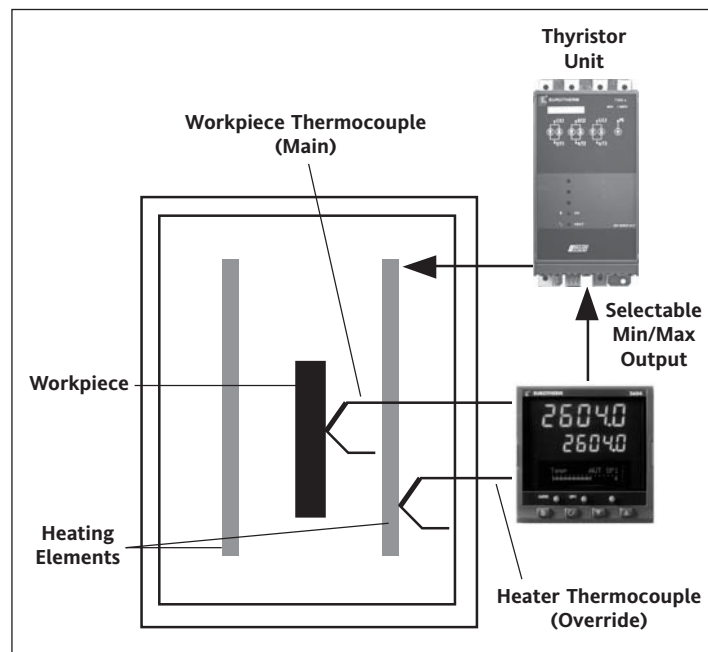


Heat treatment furnace with override control

Thermal Head Control

Thermal Head Control is a simple technique often used in furnaces and autoclaves. By maintaining a constant temperature gradient between the heater and the workpiece, a constant heat transfer from the heater to the workpiece is maintained. This arrangement improves the efficiency of the furnace by minimising the heat up time and the energy consumed.

One possible arrangement is shown in the diagram below is to set the SP Trim value of the Override controller equal to desired thermal head. In this application the setpoint programmer generates the setpoint for both loops, with the override setpoint being offset by the SP trim value. The main controller regulates the temperature of the workpiece and the controller maintains a maximum thermal head between the heater and the workpiece. A further enhancement of this application could allow the setpoint programmer to vary the thermal head setpoint from directly under program control.

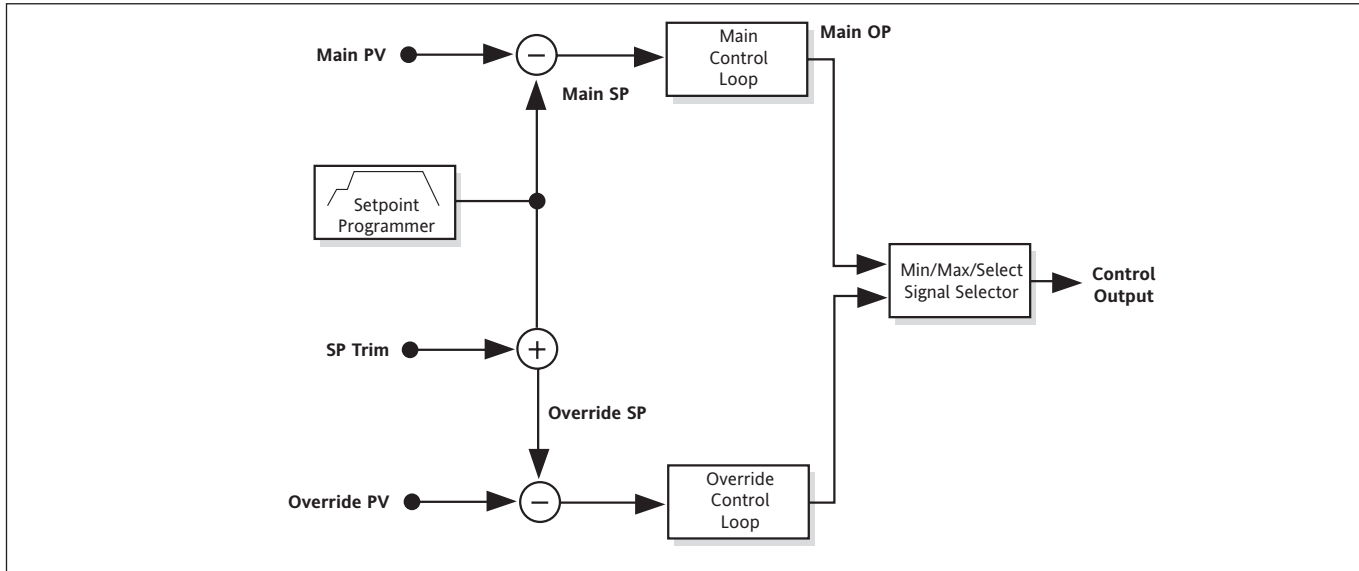

Thermal Head Control

Eurotherm: International sales and service

AUSTRALIA Sydney
Eurotherm Pty. Ltd.
T (+61 2) 9838 0099
E info.au@eurotherm.com

AUSTRIA Vienna
Eurotherm GmbH
T (+43 1) 7987601
E info.at@eurotherm.com

BELGIUM & LUXEMBOURG Moha
Eurotherm S.A./N.V.
T (+32) 85 274080
E info.be@eurotherm.com

BRAZIL Campinas-SP
Eurotherm Ltda.
T (+5519) 3707 5333
E info.br@eurotherm.com

DENMARK Copenhagen
Eurotherm Danmark AS
T (+45 70) 234670
E info.dk@eurotherm.com

FINLAND Abo
Eurotherm Finland
T (+358) 22506030
E info.fi@eurotherm.com

FRANCE Lyon
Eurotherm Automation SA
T (+33 478) 664500
E info.fr@eurotherm.com

GERMANY Limburg
Eurotherm Deutschland GmbH
T (+49 6431) 2980
E info.de@eurotherm.com

HONG KONG & CHINA
Eurotherm Limited North Point
T (+85 2) 28733826
E info.hk@eurotherm.com

Guangzhou Office
T (+86 20) 8755 5099
E info.cn@eurotherm.com

Beijing Office
T (+86 10) 6567 8506
E info.cn@eurotherm.com

Shanghai Office
T (+86 21) 6145 1188
E info.cn@eurotherm.com

INDIA Chennai
Eurotherm India Limited
T (+91 44) 24961129
E info.in@eurotherm.com

IRELAND Dublin
Eurotherm Ireland Limited
T (+353 1) 4691800
E info.ie@eurotherm.com

ITALY Como
Eurotherm S.r.l.
T (+39 31) 975111
E info.it@eurotherm.com

KOREA Seoul
Eurotherm Korea Limited
T (+82 31) 2738507
F (+82 31) 2738508

NETHERLANDS Alphen a/d Rijn
Eurotherm B.V.
T (+31 172) 411752
E info.nl@eurotherm.com

NORWAY Oslo
Eurotherm A/S
T (+47 67) 592170
E info.no@eurotherm.com

POLAND Katowice
Invensys Eurotherm Sp z o.o.
T (+48 32) 2185100
E info.pl@eurotherm.com

SPAIN Madrid
Eurotherm España SA
T (+34 91) 6616001
E info.es@eurotherm.com

SWEDEN Malmo
Eurotherm AB
T (+46 40) 384500
E info.se@eurotherm.com

SWITZERLAND Wallerau
Eurotherm Produkte (Schweiz) AG
T (+41 44) 7871040
E info.ch@eurotherm.com

UNITED KINGDOM Worthing
Eurotherm Limited
T (+44 1903) 268500
E info.uk@eurotherm.com

U.S.A. Leesburg VA
Eurotherm Inc.
T (+1 703) 443 0000
E info.us@eurotherm.com
www.eurotherm.com

ED53

© Copyright Eurotherm Limited 2007

Invensys, Eurotherm, the Eurotherm logo, Chessell, EurothermSuite, Mini8, Eycan, Eyris and Wonderware are trademarks of Invensys plc, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners.

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only.

Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.