



GMS800 MODULAR GAS ANALYZERS

TAILOR-MADE GAS ANALYSIS SOLUTIONS FOR
PROCESS AND EMISSION MONITORING

Extractive Gas Analyzers

SICK
Sensor Intelligence.

Modular analyzer system – flexible configuration, options tailored for almost any application



Emission monitoring according to EN 15267

- Emission measurements of very low concentrations, e.g. in power plants, cement plants or waste incineration plants and in the pulp and paper industry
- With the analysis module DEFOR, the specialist for gas turbines due to measurement of very low SO₂, NO and NO₂ concentrations
- Monitoring of NO_x in denitrification plants by direct measurement of NO and NO₂ as well as compiling to NO_x in the analyzer
- Efficient measurement in denitrification plants
- QAL1 certificate available for plants requiring approval

Process gas measurements for more than 60 components

- Efficient process gas analysis in applications of the chemical and petrochemical industry – also in ex areas
- High H₂S contents in reactive or sour gases
- Reliable CO monitoring for explosion protection in coal mills and coal bunkers
- Furnace gas measurement of blast furnaces or coke ovens
- Quality audits in air separation plants and purity measurement of gases (e.g. 5 ppm CO concentration in H₂ in hydrogen production)

4 types of enclosures for easy integration at the installation location**Type GMS810:**

19" rack housing with integrated control unit (BCU), 4 rack units, IP 40

**Type GMS815P:**

Wall enclosure, IP 65 for use in rough industrial environment, optionally usable in explosion zones 1 and 2

**Type GMS820P:**

Flame-proof enclosure, IP 65, for use in explosion zone 1

**Type GMS811:**

19" rack housing with 4 rack units, IP 40

**Type GMS840:**

Wall enclosure, IP 65 for use in rough industrial environment, optionally usable in explosion zone 2

6 Analyzer modules for more than 60 gases**DEFOR**

Modern UV gas analyzer for simultaneous measurement of up to 3 gas components. Specialist for extremely selective NO measurement with small measuring ranges and an all-rounder for many other UV-active gases, e.g. SO₂, NO₂, NO, CS₂ and COS. As an option calibration cells are available.

UNOR

Highly selective NDIR analyzer for continuous measurement of almost any gas component which absorbs in the infra-red spectral range. Especially insensitive to building vibrations due to the variably adjustable chopper frequency. As an option calibration cells are available.

MULTOR

Multicomponent NDIR analyzer for continuous measurement of up to 3 IR-absorbing gases and H₂O for internal interference sensitivity correction. As an option calibration cells are available.

THERMOR

Precise heat conductivity analyzer for the determination of concentrations in binary or quasi-binary gas mixtures, e.g. H₂, He, CO₂ and Ar.


OXOR-P

Precise oxygen analyzer which operates according to the paramagnetic measuring principle. Also available as special model as especially solvent-resistant or corrosion-resistant version

OXOR-E

Determination of oxygen contents using an electrochemical cell.

TAILOR-MADE GAS ANALYSIS SOLUTIONS FOR PROCESS AND EMISSION MONITORING

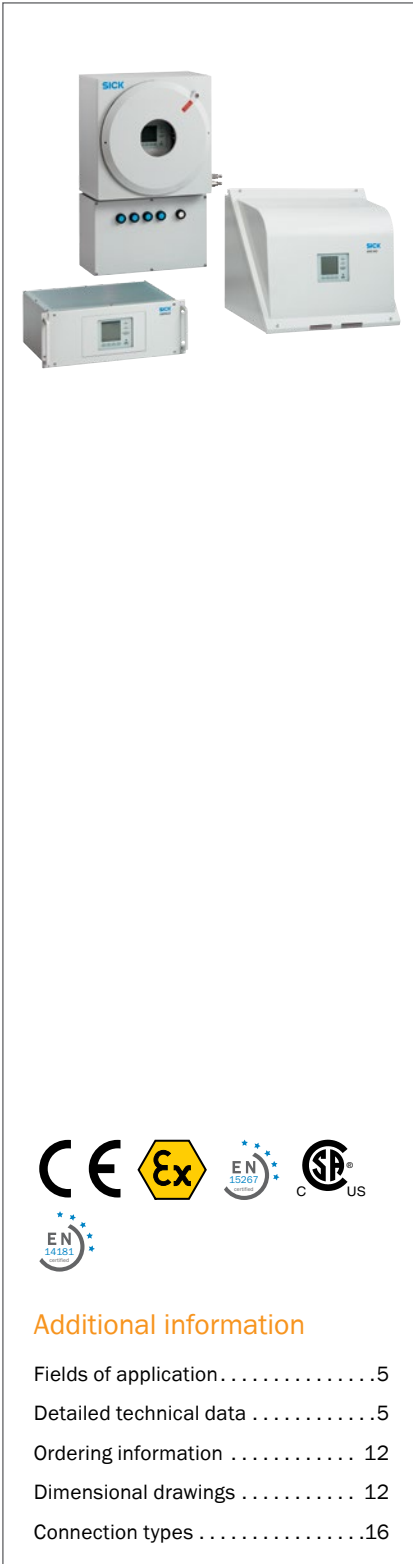

Product description

The GMS800 is an innovative product family of extractive analyzers which can measure more than 60 different gas compounds. The GMS800 is characterized by its modular design: 7 analyzing modules, one gas module, I/O modules and an operating unit. Standardized 19" racks as well as system enclosures optimized for installation in cabinets can be

used for economic system integration. Wall mounting enclosures with an ATEX approval for hazardous areas can be used in rough industrial environments. Equipped with modern software, the GMS800 comes with all required interfaces for remote control via networks through to the connection to a process control system.

At a glance

- 7 different analyzer modules: DEFOR (NDUV, UVRAS), MULTOR (NDIR), OXOR-E (electrochemical O₂), OXOR-P (paramagnetic O₂), THERMOR (TC) and UNOR (NDIR)
- 5 different types of enclosures
- Gas module with sample gas pump and/or control sensors
- New enclosure type for easy and quick integration in analyzer cabinets
- Remote diagnosis via Ethernet with software SOPAS ET

Your benefits

- Approved according to EN 15267-3 and EN 14181
- Installations in Non-Ex-areas and Ex-areas (Zone 1 and 2 according to ATEX) possible
- Minimum service and maintenance work as well as easy reconditioning of existing installations due to modular design
- Adjustment without test gases via optional adjustment unit
- Minimal influence of ambient temperature through thermostatic controlled modules
- System solutions with turn-key analyzer cabinets
- Reliable measuring results by proven measurement technology
- Easy maintenance and repair due to replacement of complete assemblies or modules



Additional information

Fields of application 5
 Detailed technical data 5
 Ordering information 12
 Dimensional drawings 12
 Connection types 16

→ www.mysick.com/en/GMS800
 For more information, just enter the link and get direct access to technical data, CAD design models, operating instructions, software, application examples and much more.

Fields of application

- Emission monitoring according to EN 15267 and process gas measurements
- Emission monitoring of very low concentrations
- Measurement of smallest concentrations of NO, NO₂ and SO₂
- NO_x monitoring by direct measurement of NO and NO₂
- Measurement of sulfur compounds in process gases
- CO monitoring for Ex protection
- Measurement of smallest concentrations in hydrogen or hydrocarbons
- VOC monitoring

Detailed technical data

The exact device specifications and performance data of the product may deviate from the information provided here, and depend on the application in which the product is being used and the relevant customer specifications.

GMS800 system

Gas flow rate	30 l/h ... 60 l/h
Sample gas temperature	Analyzer inlet: 0 °C ... +45 °C
Process pressure	Hosed gas lines: -200 hPa ... 300 hPa Tubed gas lines: -200 hPa ... 1,000 hPa
Process gas humidity	Non-condensing
Dust load	Free of dust and aerosols
Ambient temperature	+5 °C ... +45 °C
Storage temperature	-20 °C ... +70 °C
Ambient pressure	700 hPa ... 1,200 hPa
Geographical altitude	2,500 m (above mean sea level)
Ambient humidity	20 % ... 90 % Relative humidity; non-condensing
Electrical safety	CE

GMS810 design

Description	19" rack enclosure with 4 rack units, for integration in cabinets						
Enclosure rating	IP 40						
Dimensions (W x H x D)	483 mm x 178 mm x 388 mm						
Weight	9 kg ... 20 kg Depending on configuration						
Power supply	<table border="0"> <tr> <td style="padding-right: 20px;">Voltage</td> <td>93 ... 132 V AC / 186 ... 264 V AC / 210 ... 370 V AC</td> </tr> <tr> <td>Frequency</td> <td>47 ... 63 Hz</td> </tr> <tr> <td>Power consumption</td> <td>≤ 300 W</td> </tr> </table>	Voltage	93 ... 132 V AC / 186 ... 264 V AC / 210 ... 370 V AC	Frequency	47 ... 63 Hz	Power consumption	≤ 300 W
Voltage	93 ... 132 V AC / 186 ... 264 V AC / 210 ... 370 V AC						
Frequency	47 ... 63 Hz						
Power consumption	≤ 300 W						
Sample gas connections	PVDF bulkhead fitting For hose 6 x 1 mm						
Auxiliary gas connections	For purge gas or flowing reference gas Option						
Options	Gas connections: Swagelok 6 mm or Swagelok 1/4"						

GMS811 design

Description	19" rack enclosure with 4 rack units, for usage with separate control unit (BCU), for integration in cabinets						
Enclosure rating	IP 40						
Dimensions (W x H x D)	483 mm x 178 mm x 388 mm						
Weight	9 kg ... 20 kg Depending on configuration						
Power supply	<table border="0"> <tr> <td style="padding-right: 20px;">Voltage</td> <td>93 ... 132 V AC / 186 ... 264 V AC / 210 ... 370 V AC</td> </tr> <tr> <td>Frequency</td> <td>47 ... 63 Hz</td> </tr> <tr> <td>Power consumption</td> <td>≤ 300 W</td> </tr> </table>	Voltage	93 ... 132 V AC / 186 ... 264 V AC / 210 ... 370 V AC	Frequency	47 ... 63 Hz	Power consumption	≤ 300 W
Voltage	93 ... 132 V AC / 186 ... 264 V AC / 210 ... 370 V AC						
Frequency	47 ... 63 Hz						
Power consumption	≤ 300 W						
Sample gas connections	PVDF bulkhead fitting For hose 6 x 1 mm						
Auxiliary gas connections	For purge gas or flowing reference gas Option						
Options	Gas connections: Swagelok 6 mm or Swagelok 1/4"						

GMS815P design

Description	Wall-mounting enclosure with gas-tight separated analyzing and electronic units, purgable separately						
Ex-approvals	<table border="0"> <tr> <td style="padding-right: 20px;">ATEX</td> <td> II 3G Ex nR II T6 II 3G Ex pz II T6 In combination with an external, approved monitoring unit (option) II 2G Ex px II T6 In combination with an external, approved monitoring unit (option) </td> </tr> </table>	ATEX	II 3G Ex nR II T6 II 3G Ex pz II T6 In combination with an external, approved monitoring unit (option) II 2G Ex px II T6 In combination with an external, approved monitoring unit (option)				
ATEX	II 3G Ex nR II T6 II 3G Ex pz II T6 In combination with an external, approved monitoring unit (option) II 2G Ex px II T6 In combination with an external, approved monitoring unit (option)						
Enclosure rating	IP 65 / NEMA 4x						
Dimensions (W x H x D)	550 mm x 740 mm x 289 mm						
Weight	20 kg ... 57 kg Depending on configuration						
Power supply	<table border="0"> <tr> <td style="padding-right: 20px;">Voltage</td> <td>93 ... 132 V AC / 186 ... 264 V Not for pressurized enclosure: 210 ... 370 V</td> </tr> <tr> <td>Frequency</td> <td>47 ... 63 Hz</td> </tr> <tr> <td>Power consumption</td> <td>≤ 300 W</td> </tr> </table>	Voltage	93 ... 132 V AC / 186 ... 264 V Not for pressurized enclosure: 210 ... 370 V	Frequency	47 ... 63 Hz	Power consumption	≤ 300 W
Voltage	93 ... 132 V AC / 186 ... 264 V Not for pressurized enclosure: 210 ... 370 V						
Frequency	47 ... 63 Hz						
Power consumption	≤ 300 W						
Sample gas connections	PVDF bulkhead fitting For hose 6 x 1 mm						
Auxiliary gas connections	For purge gas or flowing reference gas Option						
Options	Gas connections: Swagelok 6 mm or Swagelok 1/4" Integrated flame arrestors for gas inlet and outlet Intrinsically safe outputs for measured values						

GMS820P design

Description	Flame-proof enclosure for use in Ex-zone 1 areas	
Ex-approvals	IECEX	Ex db eb [ia] IIC T6
	ATEX	II 2G Ex d II T6
Enclosure rating	IP 65	
Dimensions (W x H x D)	790 mm x 590 mm x 353 mm	
Weight	140 kg ... 150 kg Depending on configuration	
Power supply	Voltage	93 ... 132 V AC / 186 ... 264 V AC / 210 ... 370 V AC
	Frequency	47 ... 63 Hz
	Power consumption	≤ 300 W
Sample gas connections	Inside thread G1/4"	
Auxiliary gas connections	For purge gas or flowing reference gas Option	
Options	Gas connections: Swagelok 6 mm or Swagelok 1/4"	

GMS840 design

Ambient temperature	+5 °C ... +45 °C	
Storage temperature	-10 °C ... +70 °C	
Ambient humidity	10 % ... 95 % Non-condensing	
Ex-approvals	ATEX	GMS841: Ex nA nC IIC T4 Gc Ex nA nC [ia Ga] IIC T4 Gc
	NEC/CEC (US/CA)	GMS842: Class I, Division 2, Groups A, B, C, D Class I, Zone 2, AEx nA nC IIC T4 Gc Ex nA nC IIC
Electrical safety	CE	
Enclosure rating	IP 66 / NEMA 4x	
Dimensions (W x H x D)	522 mm x 475 mm x 478 mm	
Weight	≤ 30 kg Depending on configuration	
Power supply	Voltage	GMS840: 85 ... 264 V AC GMS841: 85 ... 132 V AC / 187 ... 264 V AC GMS842: 85 ... 264 V AC
	Frequency	47 ... 63 Hz
	Current consumption	≤ 10 A
	Power consumption	≤ 300 W Depending on configuration
Sample gas connections	Inside thread G1/4" For screw-in fittings Swagelok 6 mm Stainless steel, for metal tube Swagelok 1/4" Stainless steel, for metal tube PVDF compression fitting For hose 6 x 1 mm	

DEFOR analyzer module

Description	UV gas analyzer for simultaneous measurement of up to 3 gas components																				
Measurement principles	NDUV spectroscopy, UVRA spectroscopy																				
Measuring ranges	<table border="0"> <tr> <td>Cl₂</td> <td>0 ... 125 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>COS</td> <td>0 ... 250 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>CS₂</td> <td>0 ... 50 ppm / 0 ... 30 Vol.-%</td> </tr> <tr> <td>H₂S</td> <td>0 ... 25 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>NH₃</td> <td>0 ... 50 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>NO</td> <td>0 ... 10 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>NO₂</td> <td>0 ... 50 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>NO₂^(*)</td> <td>0 ... 10 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>SO₂</td> <td>0 ... 25 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>SO₂^(*)</td> <td>0 ... 10 ppm / 0 ... 100 Vol.-%</td> </tr> </table> <p>^(*) NO₂, SO₂: smallest measuring range with daily adjustment of zero point and operation in air-conditioned ambience with a temperature stability of ±2 °C</p>	Cl ₂	0 ... 125 ppm / 0 ... 100 Vol.-%	COS	0 ... 250 ppm / 0 ... 100 Vol.-%	CS ₂	0 ... 50 ppm / 0 ... 30 Vol.-%	H ₂ S	0 ... 25 ppm / 0 ... 100 Vol.-%	NH ₃	0 ... 50 ppm / 0 ... 100 Vol.-%	NO	0 ... 10 ppm / 0 ... 100 Vol.-%	NO ₂	0 ... 50 ppm / 0 ... 100 Vol.-%	NO ₂ ^(*)	0 ... 10 ppm / 0 ... 100 Vol.-%	SO ₂	0 ... 25 ppm / 0 ... 100 Vol.-%	SO ₂ ^(*)	0 ... 10 ppm / 0 ... 100 Vol.-%
Cl ₂	0 ... 125 ppm / 0 ... 100 Vol.-%																				
COS	0 ... 250 ppm / 0 ... 100 Vol.-%																				
CS ₂	0 ... 50 ppm / 0 ... 30 Vol.-%																				
H ₂ S	0 ... 25 ppm / 0 ... 100 Vol.-%																				
NH ₃	0 ... 50 ppm / 0 ... 100 Vol.-%																				
NO	0 ... 10 ppm / 0 ... 100 Vol.-%																				
NO ₂	0 ... 50 ppm / 0 ... 100 Vol.-%																				
NO ₂ ^(*)	0 ... 10 ppm / 0 ... 100 Vol.-%																				
SO ₂	0 ... 25 ppm / 0 ... 100 Vol.-%																				
SO ₂ ^(*)	0 ... 10 ppm / 0 ... 100 Vol.-%																				
Certified measuring ranges	<table border="0"> <tr> <td>NO</td> <td>0 ... 50 mg/m³ / 0 ... 1,000 mg/m³ / 0 ... 2,000 mg/m³</td> </tr> <tr> <td>NO₂</td> <td>0 ... 50 mg/m³ / 0 ... 500 mg/m³</td> </tr> <tr> <td>SO₂</td> <td>0 ... 75 mg/m³ / 0 ... 287 mg/m³ / 0 ... 2,000 mg/m³</td> </tr> </table>	NO	0 ... 50 mg/m ³ / 0 ... 1,000 mg/m ³ / 0 ... 2,000 mg/m ³	NO ₂	0 ... 50 mg/m ³ / 0 ... 500 mg/m ³	SO ₂	0 ... 75 mg/m ³ / 0 ... 287 mg/m ³ / 0 ... 2,000 mg/m ³														
NO	0 ... 50 mg/m ³ / 0 ... 1,000 mg/m ³ / 0 ... 2,000 mg/m ³																				
NO ₂	0 ... 50 mg/m ³ / 0 ... 500 mg/m ³																				
SO ₂	0 ... 75 mg/m ³ / 0 ... 287 mg/m ³ / 0 ... 2,000 mg/m ³																				
Response time	4 s Typical at 60 l/h, depending on cell length and gas flow																				
Sensitivity drift	≤ 1 % of measuring range full scale per week																				
Zero point drift	≤ 1 % of measuring range full scale per week Measuring ranges smaller than 2 x smallest measuring range: ≤ 2 % of measuring range full scale per week NO, NO ₂ , SO ₂ : ≤ 1 % of smallest measuring range per day																				
Conformities	Approved for plants requiring approval 2001/80/EC (13. BImSchV) 2000/76/EC (17. BImSchV) 27. BImSchV German Clean Air Regulations EN 15267 EN 14181 MCERTS																				
Corrective functions	Manual or automatic adjustment with test gases or adjustment cuvette																				
Test functions	Self test and fault diagnosis																				

MULTOR analyzer module

Description	Multi-component NDIR analyzer for continuous measurement of up to 3 IR-absorbing gases and H ₂ O for internal interference sensitivity correction										
Measurement principles	NDIR spectroscopy										
Measuring ranges	<table border="0"> <tr> <td>CH₄</td> <td>0 ... 400 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>CO</td> <td>0 ... 160 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>CO₂</td> <td>0 ... 100 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>NO</td> <td>0 ... 190 ppm / 0 ... 100 Vol.-%</td> </tr> <tr> <td>SO₂</td> <td>0 ... 90 ppm / 0 ... 100 Vol.-%</td> </tr> </table>	CH ₄	0 ... 400 ppm / 0 ... 100 Vol.-%	CO	0 ... 160 ppm / 0 ... 100 Vol.-%	CO ₂	0 ... 100 ppm / 0 ... 100 Vol.-%	NO	0 ... 190 ppm / 0 ... 100 Vol.-%	SO ₂	0 ... 90 ppm / 0 ... 100 Vol.-%
CH ₄	0 ... 400 ppm / 0 ... 100 Vol.-%										
CO	0 ... 160 ppm / 0 ... 100 Vol.-%										
CO ₂	0 ... 100 ppm / 0 ... 100 Vol.-%										
NO	0 ... 190 ppm / 0 ... 100 Vol.-%										
SO ₂	0 ... 90 ppm / 0 ... 100 Vol.-%										
Certified measuring ranges	<table border="0"> <tr> <td>CH₄</td> <td>0 ... 286 mg/m³ / 0 ... 500 mg/m³</td> </tr> <tr> <td>CO</td> <td>0 ... 200 mg/m³ / 0 ... 2,000 mg/m³</td> </tr> </table>	CH ₄	0 ... 286 mg/m ³ / 0 ... 500 mg/m ³	CO	0 ... 200 mg/m ³ / 0 ... 2,000 mg/m ³						
CH ₄	0 ... 286 mg/m ³ / 0 ... 500 mg/m ³										
CO	0 ... 200 mg/m ³ / 0 ... 2,000 mg/m ³										

	CO ₂	0 ... 25 Vol.-%
	NO	0 ... 250 mg/m ³ / 0 ... 2,500 mg/m ³
	SO ₂	0 ... 250 mg/m ³ / 0 ... 2,000 mg/m ³
Response time	≤ 25 s At 60 l/h, depending on cuvette length, gas flow and number of measuring components	
Sensitivity drift	≤ 1 % of measuring range full scale per week	
Zero point drift	≤ 1 % of smallest measuring range per week Measuring ranges smaller than 2 x smallest measuring range: ≤ 2 % of smallest measuring range per week	
Conformities	Approved for plants requiring approval 2001/80/EC (13. BImSchV) 2000/76/EC (17. BImSchV) 27. BImSchV German Clean Air Regulations EN 15267 EN 14181 MCERTS	
Corrective functions	Manual or automatic adjustment with test gases or adjustment cuvette	
Test functions	Self test and fault diagnosis	

OXOR-E analyzer module

Description	Determination of oxygen contents using an electrochemical cell	
Measurement principles	Electrochemical cell	
Measuring ranges	O ₂	0 ... 10 Vol.-% / 0 ... 25 Vol.-%
Certified measuring ranges	O ₂	0 ... 25 Vol.-%
Response time	20 s Typical at 60 l/h, depending on gas flow	
Sensitivity drift	≤ 2 % of measuring range full scale per week	
Zero point drift	≤ 2 % of smallest measuring range per month	
Conformities	Approved for plants requiring approval 2001/80/EC (13. BImSchV) 2000/76/EC (17. BImSchV) 27. BImSchV German Clean Air Regulations EN 15267 EN 14181 MCERTS	
Corrective functions	Manual or automatic adjustment with test gases	
Test functions	Self test and fault diagnosis	

OXOR-P analyzer module

Description	Accurate oxygen analyzer which operates according to the paramagnetic measuring principle	
Measurement principles	Paramagnetic dumbbell principle	
Measuring ranges	O ₂	0 ... 3 Vol.-% / 0 ... 100 Vol.-% Optional: smallest measuring range 0 ... 1 vol%
Certified measuring ranges	O ₂	0 ... 25 Vol.-%
Response time	≤ 4 s At a gas flow of 60 l/h	
Sensitivity drift	≤ 1 % of measuring range full scale per week	

Zero point drift	$\leq 1\%$ of smallest measuring range per week Measuring ranges smaller 5 vol%: ≤ 0.05 Vol.-% per week
Conformities	Approved for plants requiring approval 2001/80/EC (13. BImSchV) 2000/76/EC (17. BImSchV) 27. BImSchV German Clean Air Regulations EN 15267 EN 14181 MCERTS
Corrective functions	Manual or automatic adjustment with test gases
Test functions	Self test and fault diagnosis
Remark	Special versions with highly solvent-resistant or highly corrosion-resistant measuring cells available

THERMOR analyzer module

Description	Heat conductivity analyzer for the determination of concentrations in binary or quasi-binary gas mixtures																								
Measurement principles	Thermal conductivity measurement																								
Measuring ranges	<table border="0"> <tr> <td>Ar in N₂</td> <td>0 ... 10 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>Ar in O₂</td> <td>0 ... 10 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>CH₄ in biogas</td> <td>0 ... 60 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>CO₂ in air</td> <td>0 ... 10 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>H₂ in Ar</td> <td>0 ... 1 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>H₂ in CH₄</td> <td>0 ... 1 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>H₂ in CO₂</td> <td>0 ... 1 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>H₂ in blast furnace gas</td> <td>0 ... 1 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>H₂ in N₂</td> <td>0 ... 1 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>He in N₂</td> <td>0 ... 2 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>NH₃ in CO₂</td> <td>0 ... 15 Vol.-% / 0 ... 100 Vol.-%</td> </tr> <tr> <td>NH₃ in air</td> <td>0 ... 15 Vol.-% / 0 ... 100 Vol.-%</td> </tr> </table>	Ar in N ₂	0 ... 10 Vol.-% / 0 ... 100 Vol.-%	Ar in O ₂	0 ... 10 Vol.-% / 0 ... 100 Vol.-%	CH ₄ in biogas	0 ... 60 Vol.-% / 0 ... 100 Vol.-%	CO ₂ in air	0 ... 10 Vol.-% / 0 ... 100 Vol.-%	H ₂ in Ar	0 ... 1 Vol.-% / 0 ... 100 Vol.-%	H ₂ in CH ₄	0 ... 1 Vol.-% / 0 ... 100 Vol.-%	H ₂ in CO ₂	0 ... 1 Vol.-% / 0 ... 100 Vol.-%	H ₂ in blast furnace gas	0 ... 1 Vol.-% / 0 ... 100 Vol.-%	H ₂ in N ₂	0 ... 1 Vol.-% / 0 ... 100 Vol.-%	He in N ₂	0 ... 2 Vol.-% / 0 ... 100 Vol.-%	NH ₃ in CO ₂	0 ... 15 Vol.-% / 0 ... 100 Vol.-%	NH ₃ in air	0 ... 15 Vol.-% / 0 ... 100 Vol.-%
Ar in N ₂	0 ... 10 Vol.-% / 0 ... 100 Vol.-%																								
Ar in O ₂	0 ... 10 Vol.-% / 0 ... 100 Vol.-%																								
CH ₄ in biogas	0 ... 60 Vol.-% / 0 ... 100 Vol.-%																								
CO ₂ in air	0 ... 10 Vol.-% / 0 ... 100 Vol.-%																								
H ₂ in Ar	0 ... 1 Vol.-% / 0 ... 100 Vol.-%																								
H ₂ in CH ₄	0 ... 1 Vol.-% / 0 ... 100 Vol.-%																								
H ₂ in CO ₂	0 ... 1 Vol.-% / 0 ... 100 Vol.-%																								
H ₂ in blast furnace gas	0 ... 1 Vol.-% / 0 ... 100 Vol.-%																								
H ₂ in N ₂	0 ... 1 Vol.-% / 0 ... 100 Vol.-%																								
He in N ₂	0 ... 2 Vol.-% / 0 ... 100 Vol.-%																								
NH ₃ in CO ₂	0 ... 15 Vol.-% / 0 ... 100 Vol.-%																								
NH ₃ in air	0 ... 15 Vol.-% / 0 ... 100 Vol.-%																								
Response time	≤ 20 s At a gas flow of 60 l/h																								
Sensitivity drift	$\leq 1\%$ of measuring range full scale per week																								
Zero point drift	$\leq 1\%$ of smallest measuring range per week Measuring ranges smaller than 2 x smallest measuring range: $\leq 2\%$ of smallest measuring range per week																								
Corrective functions	Manual or automatic adjustment with test gases																								
Test functions	Self test and fault diagnosis																								

UNOR analyzer module

Description	Highly selective NDIR analyzer for continuous measurement of almost any gas component which absorbs in the infra-red spectral range
Measurement principles	NDIR spectroscopy
Measuring ranges	<p>C₂H₂ 0 ... 300 ppm / 0 ... 100 Vol.-%</p> <p>C₂H₂F₄ 0 ... 100 ppm / 0 ... 100 Vol.-%</p> <p>C₂H₄ 0 ... 300 ppm / 0 ... 100 Vol.-%</p> <p>C₃H₆ 0 ... 300 ppm / 0 ... 100 Vol.-%</p> <p>C₃H₈ 0 ... 100 ppm / 0 ... 100 Vol.-%</p> <p>C₄H₆ 0 ... 5,000 ppm / 0 ... 20 Vol.-%</p> <p>CH₄ 0 ... 70 ppm / 0 ... 100 Vol.-%</p> <p>CH₃OH 0 ... 150 ppm / 0 ... 10 Vol.-%</p> <p>CO 0 ... 20 ppm / 0 ... 100 Vol.-%</p> <p>CO+CO₂ 0 ... 50 ppm / 0 ... 100 Vol.-%</p> <p>CO₂ 0 ... 10 ppm / 0 ... 100 Vol.-%</p> <p>COCl₂ 0 ... 200 ppm / 0 ... 10 Vol.-%</p> <p>N₂O 0 ... 25 ppm / 0 ... 100 Vol.-%</p> <p>NO 0 ... 75 ppm / 0 ... 100 Vol.-%</p> <p>NH₃ 0 ... 300 ppm / 0 ... 100 Vol.-%</p> <p>SF₆ 0 ... 50 ppm / 0 ... 100 Vol.-%</p> <p>SO₂ 0 ... 26 ppm / 0 ... 100 Vol.-%</p> <p>More than 60 measuring components available</p>
Certified measuring ranges	<p>CO 0 ... 75 mg/m³ / 0 ... 750 mg/m³ / 0 ... 3,000 mg/m³</p> <p>CO₂ 0 ... 25 Vol.-%</p> <p>N₂O 0 ... 50 mg/m³ / 0 ... 500 mg/m³</p> <p>NO 0 ... 100 mg/m³ / 0 ... 1,000 mg/m³ / 0 ... 2,000 mg/m³</p> <p>SO₂ 0 ... 75 mg/m³ / 0 ... 287 mg/m³ / 0 ... 2,000 mg/m³</p> <p>NO_x 0 ... 100 mg/m³ / 0 ... 1,000 mg/m³ / 0 ... 2,000 mg/m³</p> <p>CH₄ 0 ... 50 mg/m³ / 0 ... 500 mg/m³</p>
Response time	3 s Typical at 60 l/h, depending on cell length and gas flow
Sensitivity drift	≤ 1 % of measuring range full scale per week
Zero point drift	≤ 1 % of smallest measuring range per week Measuring ranges smaller than 2 x smallest measuring range: ≤ 2 % of smallest measuring range per week
Conformities	Approved for plants requiring approval 2001/80/EC (13. BImSchV) 2000/76/EC (17. BImSchV) 27. BImSchV German Clean Air Regulations EN 15267 EN 14181 MCERTS
Corrective functions	Manual or automatic adjustment with test gases or adjustment cuvette
Test functions	Self test and fault diagnosis

BCU control unit

Interfaces and bus protocols	Ethernet	Modbus TCP
	Ethernet	OPC
	Ethernet	SOPAS ET
	RS-485	Modbus RTU
Indication	Status LEDs: "Power", "Maintenance" and "Failure" LC display	
Operation	Via LC display and membrane keyboard	

I/O module

Description	Closed module with top-hat rail adapter or module for integration into enclosures
Analog outputs	4 outputs: 0/2/4 ... 20 mA, 500 Ω Electrically isolated
Analog inputs	2 inputs: 0/4 ... 20 mA Not electrically isolated
Digital outputs	8 outputs: 34 V AC, 500 mA / 48 V DC, 500 mA
Digital inputs	8 inputs: 42 V All inlets with common reference potential

Gas module


Sample gas connections	PVDF compression fitting For hose 6 x 1 mm Swagelok 6 mm Stainless steel, for metal tube Swagelok 1/4" Stainless steel, for metal tube
Options	Magnetic piston pump (0 ... 60 l/h at 100 hPa low pressure) Humidity sensor Pressure sensor (500 ... 1500 hPa) Flow sensor (0 ... 100 l/h, ±20%)

Ordering information



Our regional sales organization will help you to select the optimum device configuration.

Dimensional drawings (Dimensions in mm (inch))


GMS810 design

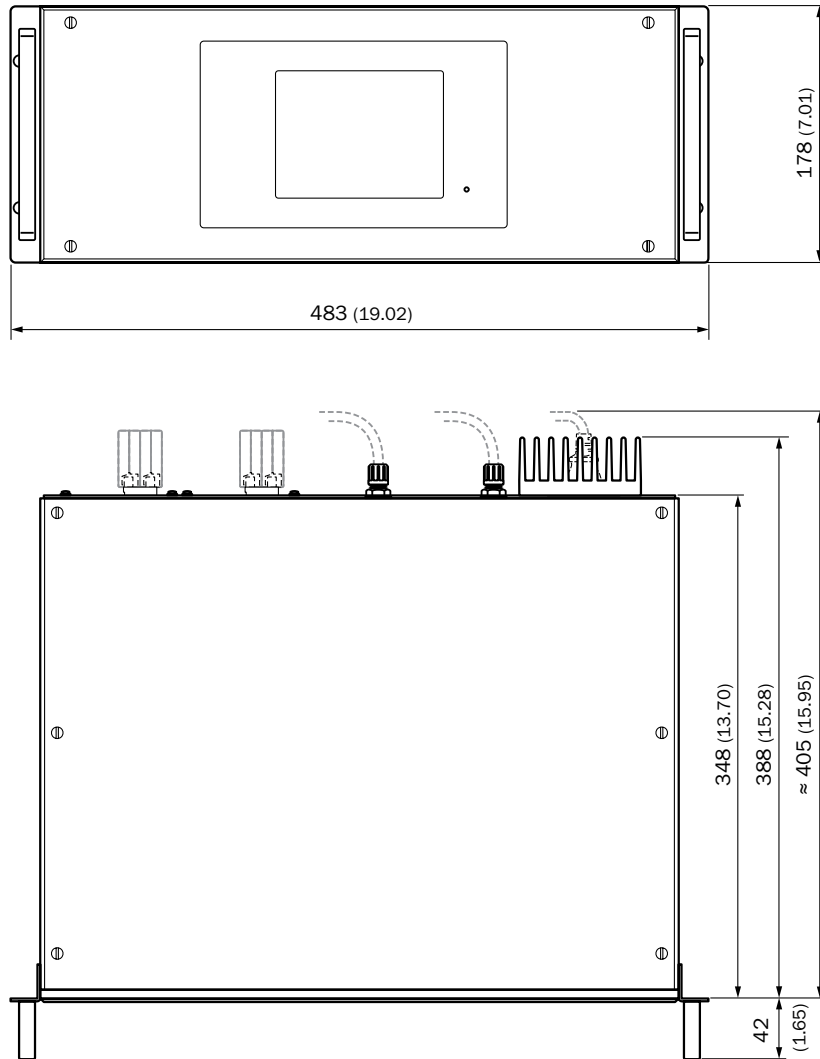


GMS811 design

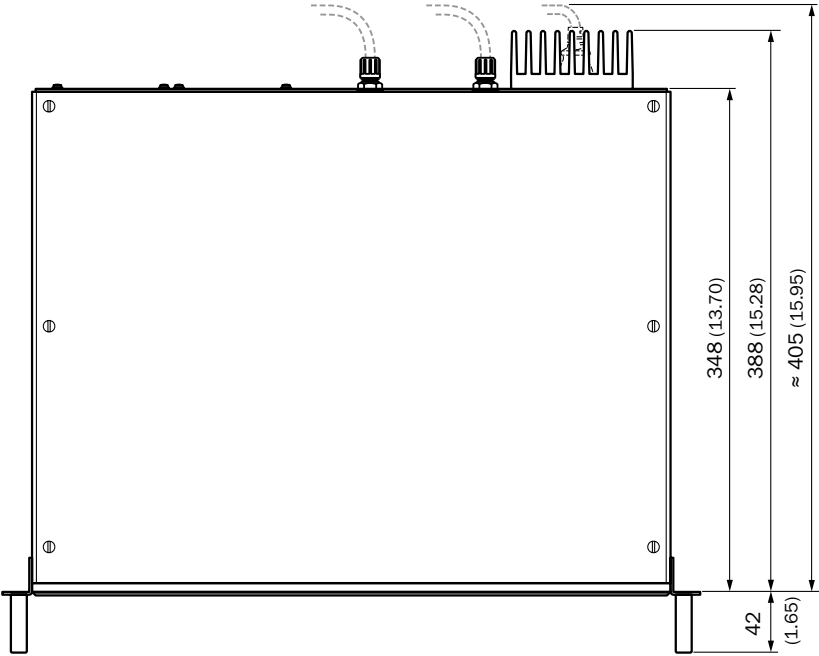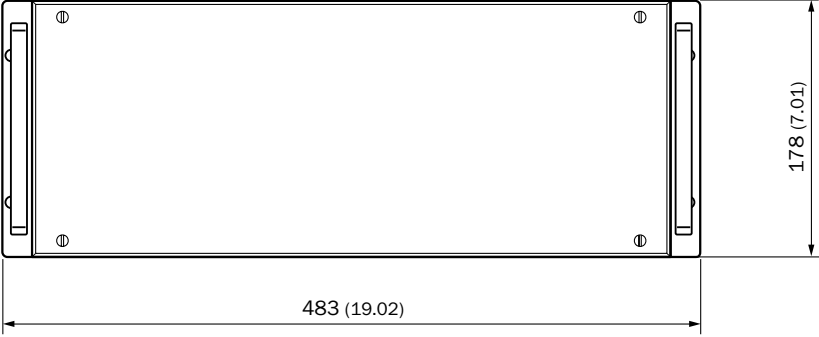





GMS815P design

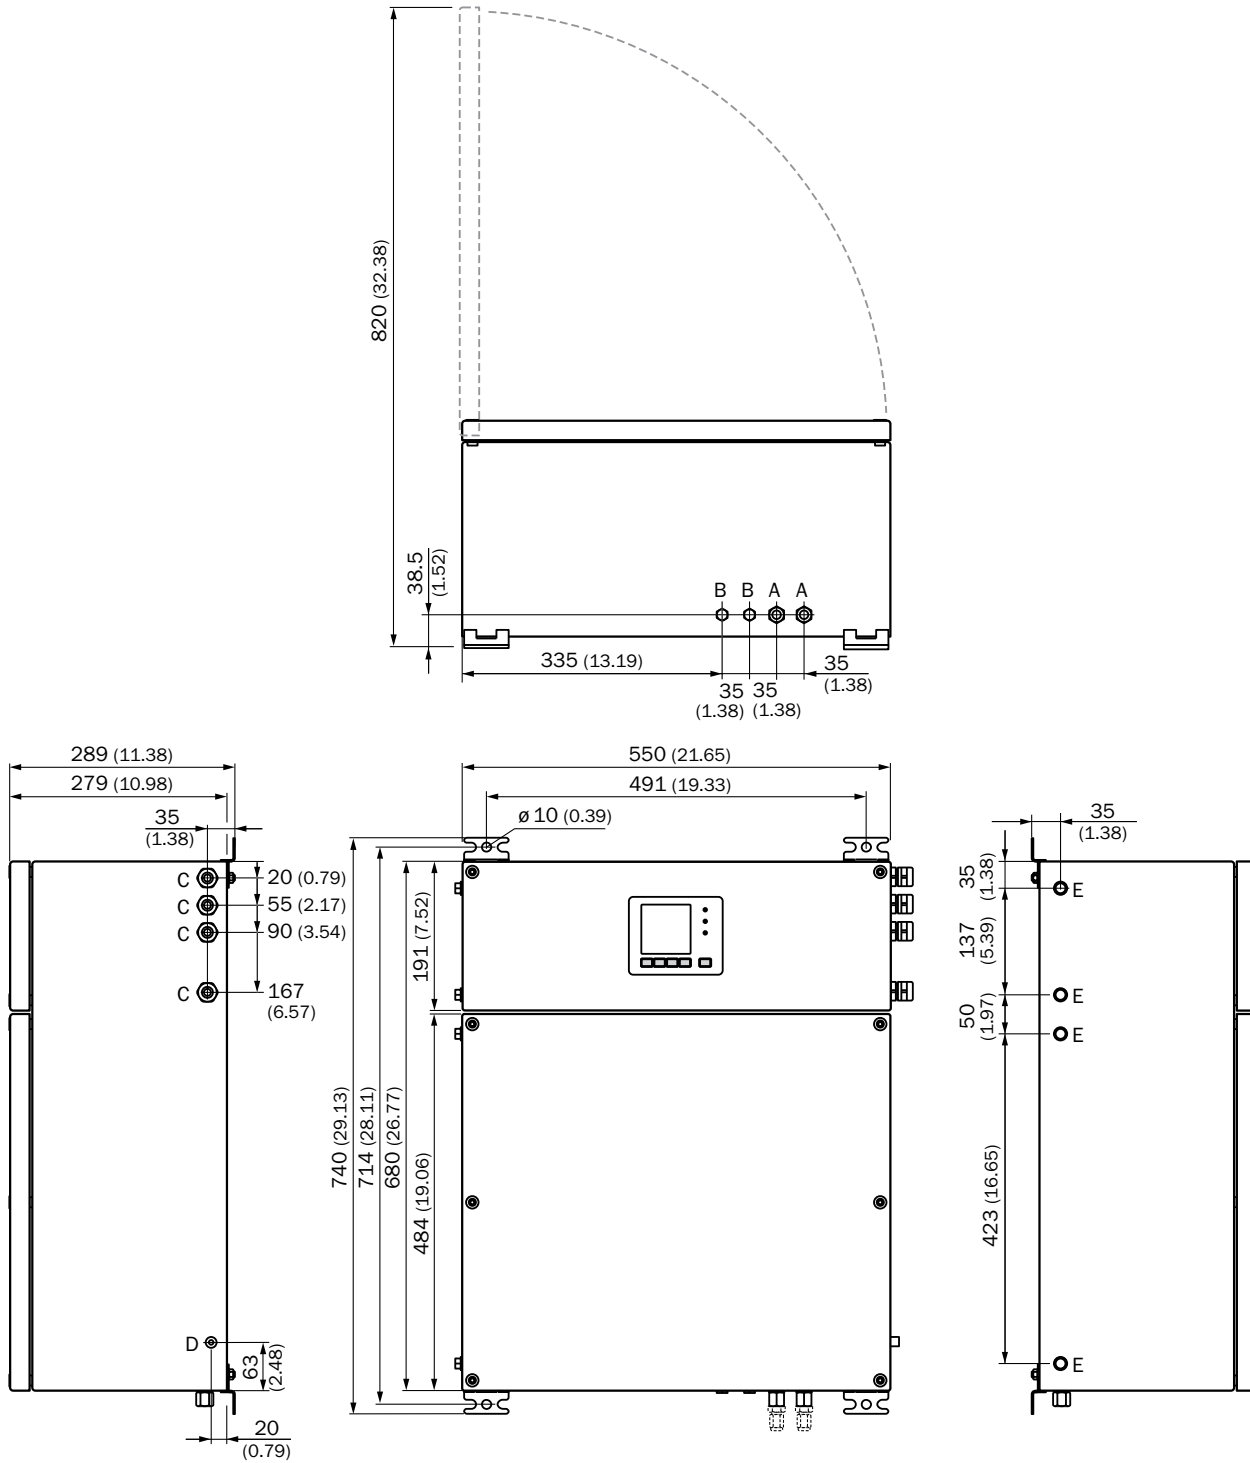

GMS820P design

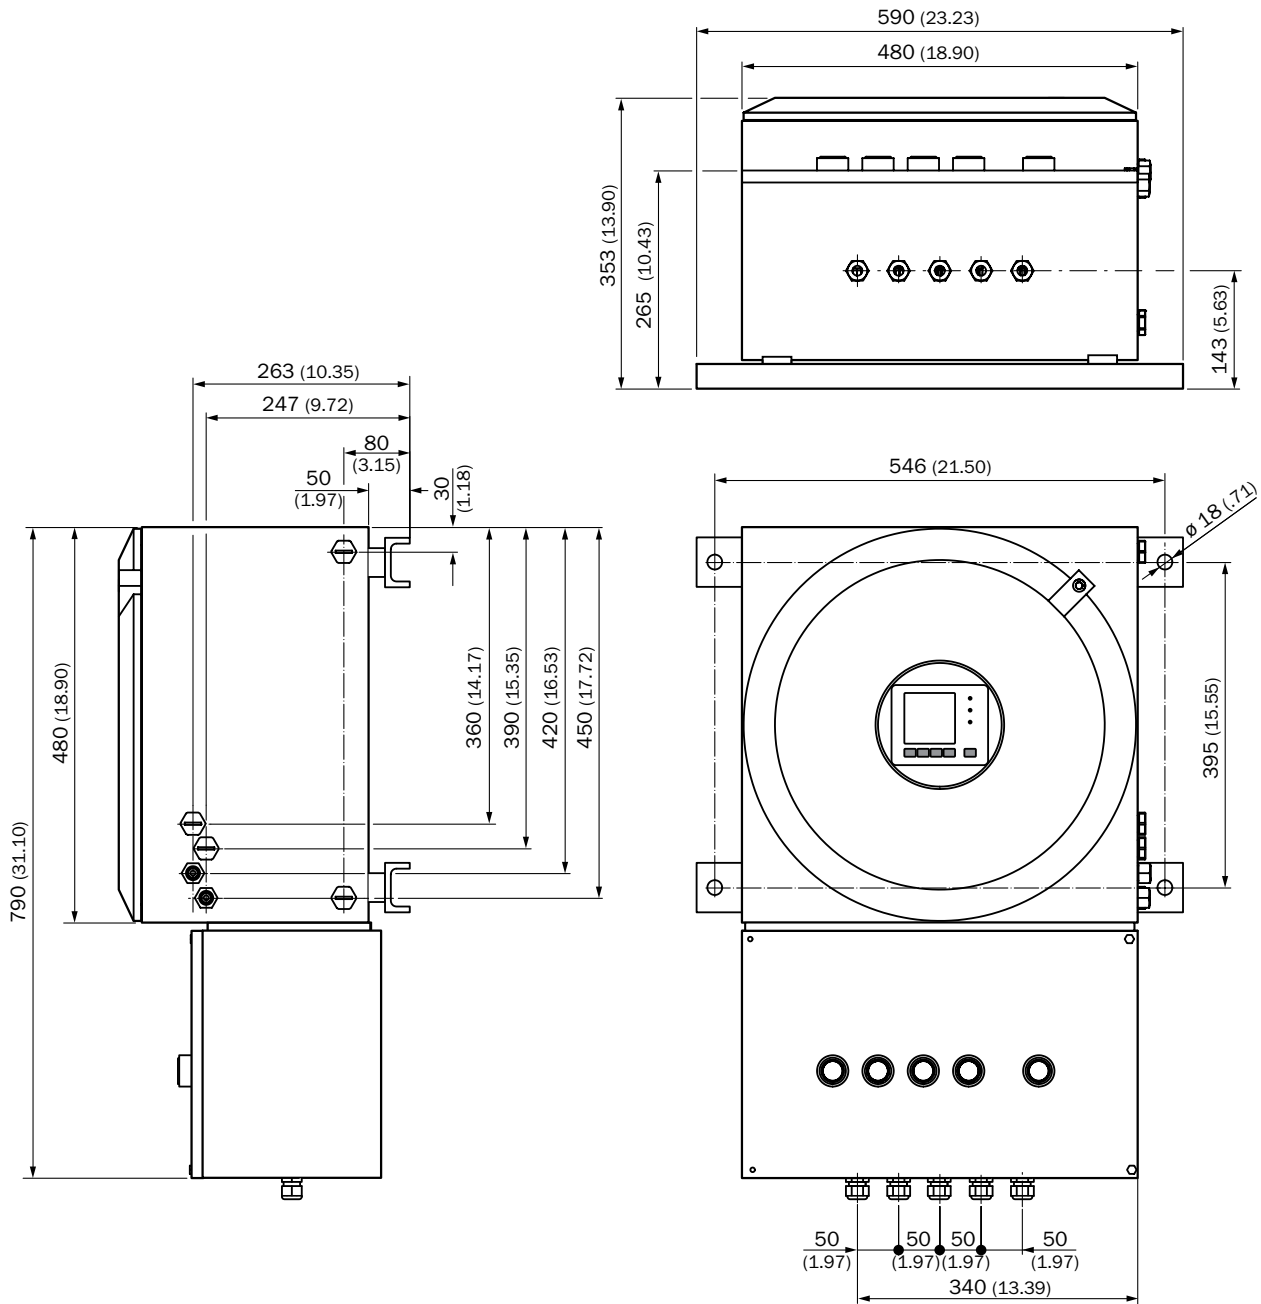


GMS840 design

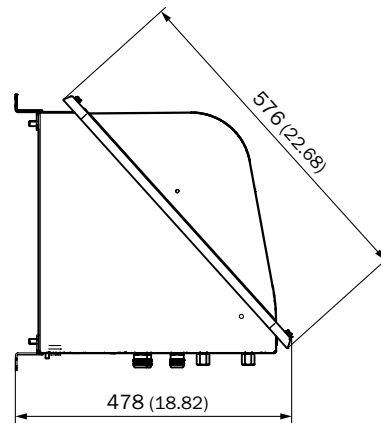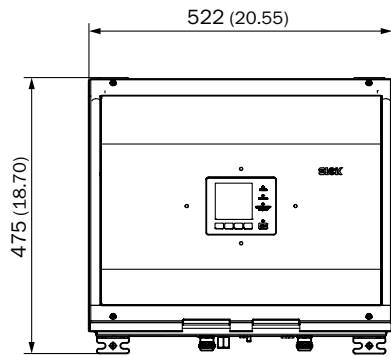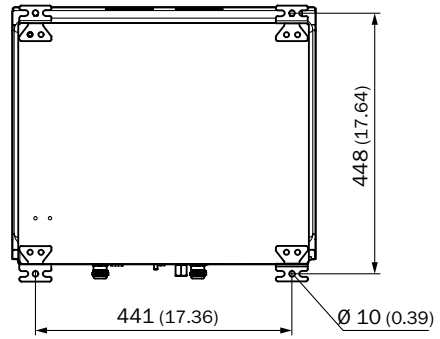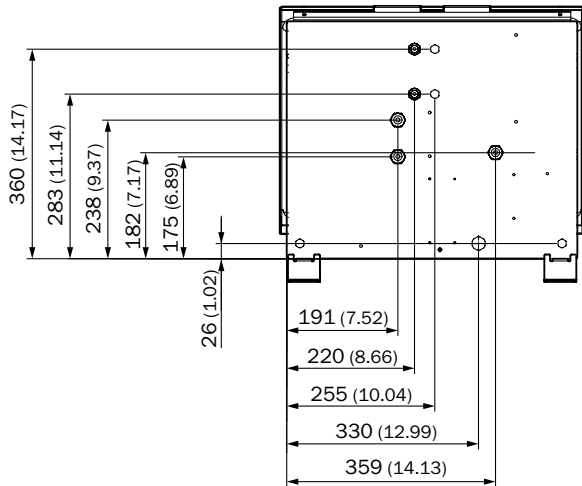


Connection types

GMS810 design

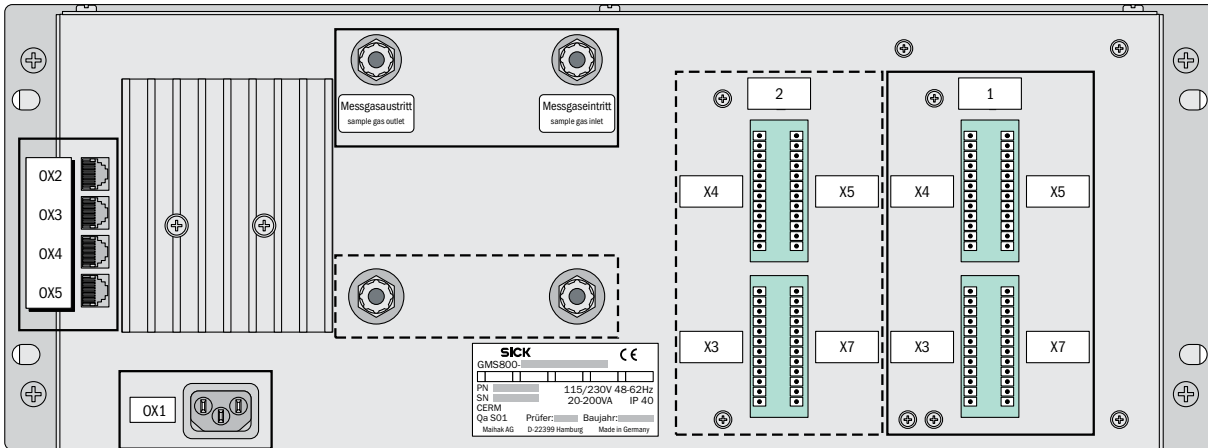

GMS800 I/O module

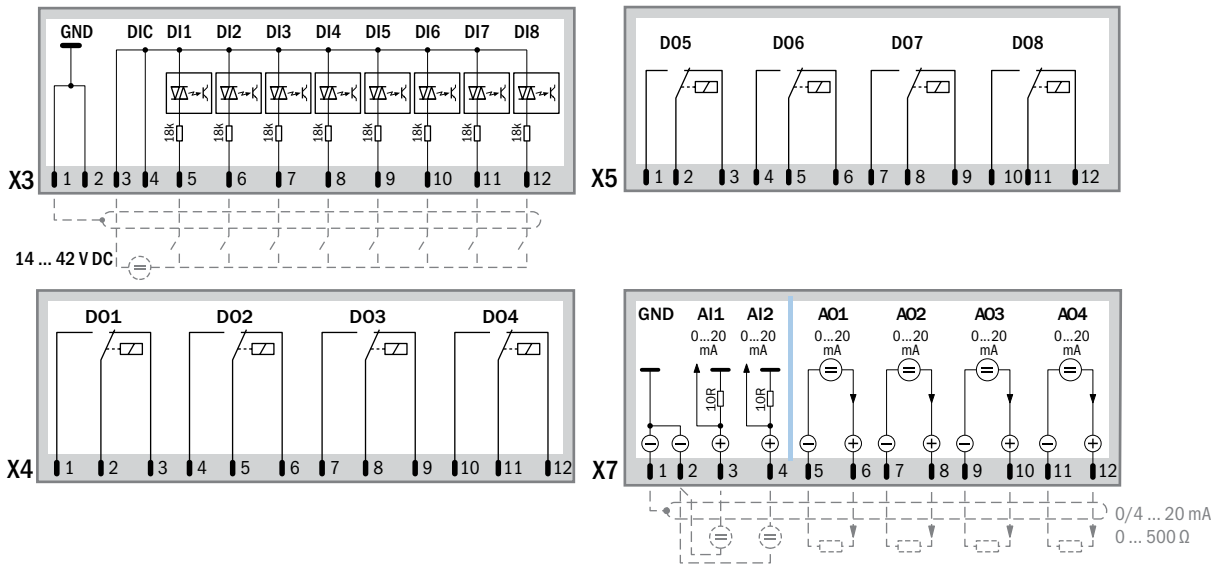

REGISTER AT WWW.SICK.COM TODAY AND ENJOY ALL THE BENEFITS






- ✔ Select products, accessories, documentation and software quickly and easily.
- ✔ Create, save and share personalized wish lists.
- ✔ View the net price and date of delivery for every product.
- ✔ Requests for quotation, ordering and delivery tracking made easy.
- ✔ Overview of all quotations and orders.
- ✔ Direct ordering: submit even very complex orders in moments.
- ✔ View the status of quotations and orders at any time. Receive e-mail notifications of status changes.
- ✔ Easily repeat previous orders.
- ✔ Conveniently export quotations and orders to work with your systems.



SERVICES FOR MACHINES AND SYSTEMS: SICK LifeTime Services

Our comprehensive and versatile LifeTime Services are the perfect addition to the comprehensive range of products from SICK. The services range from product-independent consulting to traditional product services.



- 
Consulting and design
 Safe and professional
- 
Product and system support
 Reliable, fast and on-site
- 
Verification and optimization
 Safe and regularly inspected
- 
Upgrade and retrofits
 Easy, safe and economical
- 
Training and education
 Practical, focused and professional

SICK AT A GLANCE

SICK is a leading manufacturer of intelligent sensors and sensor solutions for industrial applications. With almost 7,000 employees and over 50 subsidiaries and equity investments as well as numerous representative offices worldwide, we are always close to our customers. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in various industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services round out our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

Worldwide presence:

Australia, Austria, Belgium, Brazil, Canada, Chile, China, Czech Republic, Denmark, Finland, France, Germany, Great Britain, Hungary, India, Israel, Italy, Japan, Malaysia, Mexico, Netherlands, New Zealand, Norway, Poland, Romania, Russia, Singapore, Slovakia, Slovenia, South Africa, South Korea, Spain, Sweden, Switzerland, Taiwan, Thailand, Turkey, United Arab Emirates, USA, Vietnam.

Detailed addresses and additional representatives → www.sick.com