

Type 330/335/340 Instrument Air Filter Regulator & Regulator

Series

Type-330 Filter Regulator | Type-335 NACE Filter Regulator

Type-340 Regulator

The Type 330/335/340 Series of Instrument Air Filter Regulators and Regulators are designed to provide clean, accurate air pressure to instruments, valves, and other automatic control equipment in a lightweight, compact housing. These quality instruments are constructed of durable materials that will provide long lasting performance in industrial environments.

Type-330 Filter Regulator

Designed for use in systems that require clean, accurate instrument air, the Type-330 provides pressure regulation and filtration in an integral compact package. Available in 1/4" NPT porting for normal operation and 1/2" NPT porting for high flow capacity requirements.

Type-330 Filter Regulator with Automatic Drain

Condensate waste liquid is automatically flushed out when a change in air flow occurs or when the supply pressure is reduced. The low maintenance Automatic Drain helps prolong the life of the regulator and filter by preventing corrosion on the bottom of regulator and reducing the load of the filter.

Type-335 NACE Filter Regulator

Materials in the Type-335 meet NACE MR-0175 requirements (available in 1/4" only)

Type-340 Regulator

Designed to provide accurate, constant control under variable flow rates and supply pressures. Compact and lightweight housing allows this unit to be mounted in applications where space is limited. Its durable construction withstands long term installation in harsh environments.

FEATURES

Compact and Light Weight Construction

Mounts where competitive units won't
1/4" NPT and 1/2" NPT
Ported Versions

Automatic Drain Option

High Flow Capacity

Direct, Pipe or Bracket Mounting

Compatible for field replacements of other brands

Low Air Consumption

Lower operating costs

Tapped Exhaust Option


Rugged, Corrosion Resistant Design

Functional for harsh conditions



Type 330/335/340 Series

Rugged and reliable instrument air filtration and regulation

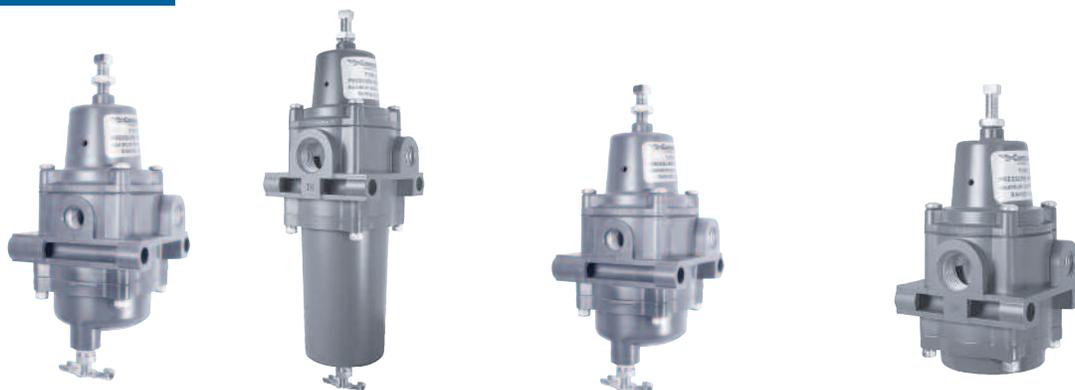


S P E C I F I C A T I O N S

	TYPE 330		TYPE 335	TYPE 340	
In/Out Port Size (Gauge Ports 1/4 NPT)	1/4" NPT	1/2" NPT	1/4" NPT	1/4" NPT	1/2" NPT
Output Ranges	0-30 psig (0-2 BAR) 0-60 psig (0-4 BAR) 0-120 psig (0-8 BAR)		0-30 psig (0-2 BAR) 0-60 psig (0-4 BAR) 0-100 psig (0-7 BAR)	0-30 psig (0-2 BAR) 0-60 psig (0-4 BAR) 0-120 psig (0-8 BAR)	
Maximum Supply Pressure	Manual drain: 250 psig (17 BAR) Auto drain: 150 psig (10 BAR)		Manual drain only: 250 psig (17 BAR)	Manual drain only: 250 psig (17 BAR)	
Mounting	Pipe, bracket or through body direct				
Filter	40 micron (5 optional)			None	
Cv Values	0.5 at 150 psig supply and 80 psig setpoint	2.5 at 150 psig supply and 80 psig setpoint	0.5 at 150 psig supply and 80 psig setpoint	0.5 at 150 psig supply and 80 psig setpoint	2.5 at 150 psig supply and 80 psig setpoint
Exhaust Capacity	0.1 scfm (2.83 NI/min) with downstream pressure 5 psig (0.3 BAR) above set point				
Sensitivity	1" of water				
Air Consumption	Less than 5 scfh (2.5 NI/min)				
Effect of Supply Pressure Variation	Less than 0.25 psig (0.017 BAR) for 25 psig (1.7 BAR) change	Less than 0.5 psig (0.035 BAR) for 25 psig (1.7 BAR) change	Less than 0.25 psig (0.017 BAR) for 25 psig (1.7 BAR) change	Less than 0.25 psig (0.017 BAR) for 25 psig (1.7 BAR) change	Less than 0.5 psig (0.035 BAR) for 25 psig (1.7 BAR) change
Temperature Limits	Manual drain: 0° to 160° F (-18° C to 71° C) Auto drain: 32° to 160° F (0° C to 71° C)		Manual drain: -20° to 180° F (-29° C to 82° C)	0° to 160° F (-18° C to 71° C)	
Weight	1.2 lbs (.45 kg)	1.71 lbs (0.64 kg)	1.2 lbs (.45 kg)	1.15 lbs (0.43 kg)	1.38 lbs (0.52 kg)
Operating Media	Air, Inert Gas and Sweet Natural Gas		Air, Inert Gas and Sweet or Sour Natural Gas	Air, Inert Gas and Sweet Natural Gas	


M A T E R I A L S

Body	Diecast Aluminum Alloy, Iridite and Baked Epoxy Finish		
Filter	Polyethylene	Phenolic Impregnated Cellulose	None
Diaphragm, Gasket, Pintle	Nitrile Elastomer and Nylon Fabric	Viton	Nitrile Elastomer and Nylon Fabric
Additional Materials	Brass, Zinc Plated Steel, Acetal	316 Stainless Steel, Aluminum, Heat Treated Plated Steel	Brass, Zinc Plated Steel, Acetal

FLOW CURVES
Type 330/340: 1/2" NPT Units

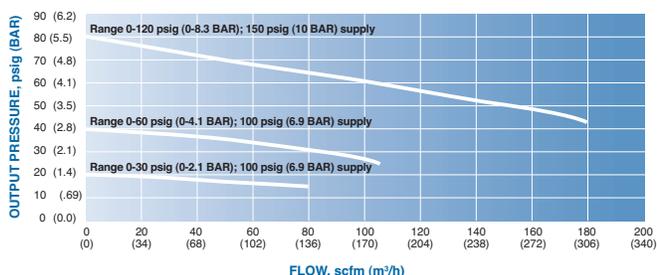


FLOW CURVES
Type 330/340: 1/4" NPT Units

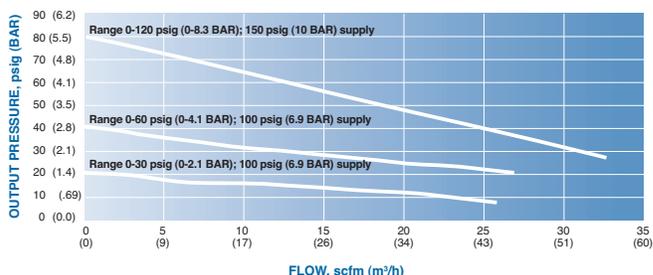


Type 330/335/340 Series

Dimensions



TYPE 330 DIMENSIONS

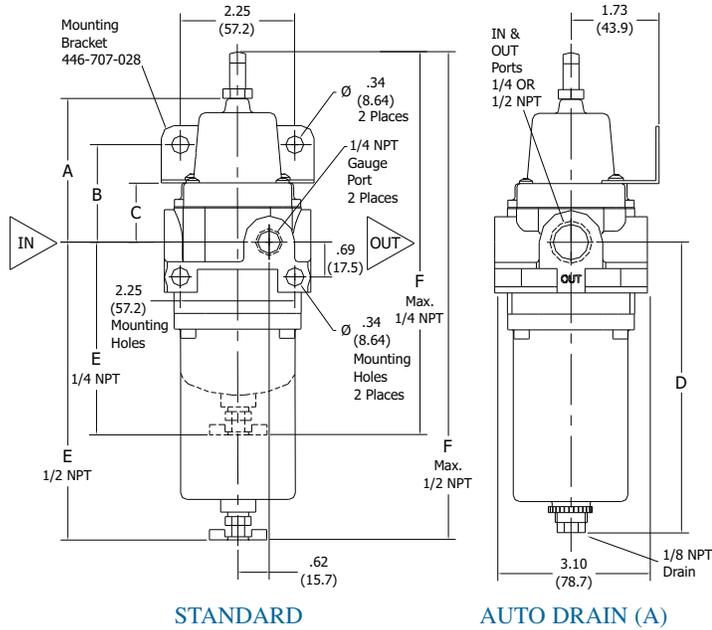

TYPE 340 DIMENSIONS

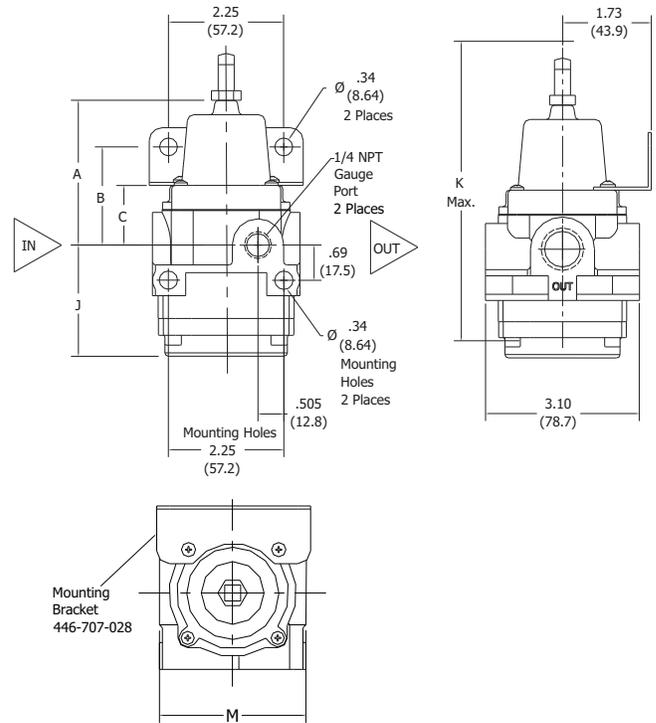

SECTIONAL DRAWINGS


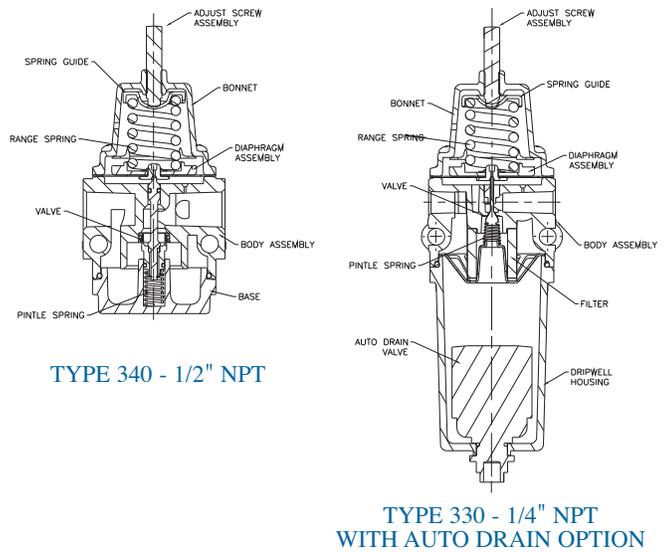
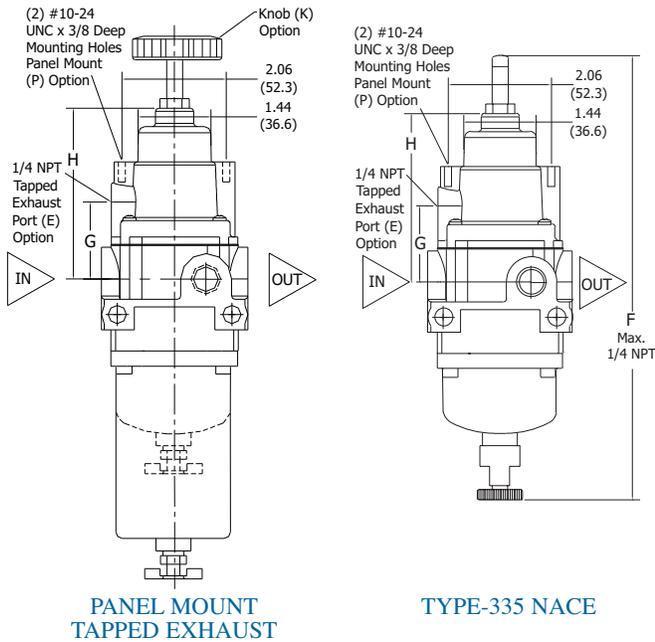


Port Size (NPT)	A		B		C		D		E		F		G		H		J		K		M	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
1/4"	2.66	67.6	1.76	44.7	1.00	25.4	5.74	145.8	3.42	86.8	7.15	181.6	1.22	31.0	3.19	81.0	2.05	52.0	5.60	137.2	2.56	65.0
1/2"	2.83	71.9	1.93	49.0	1.17	29.7	5.84	148.3	6.05	153.7	9.78	248.4	1.39	35.3	3.36	85.3	2.15	54.6	5.77	146.6	2.88	73.2

Type 330/335/340 Series

Ordering

Use this coding system to order

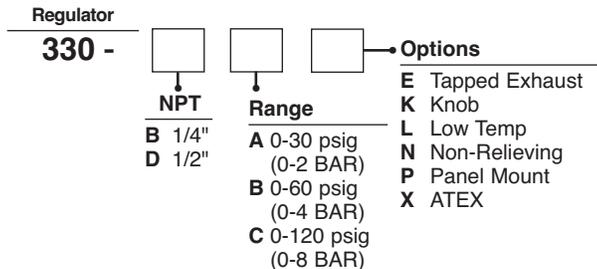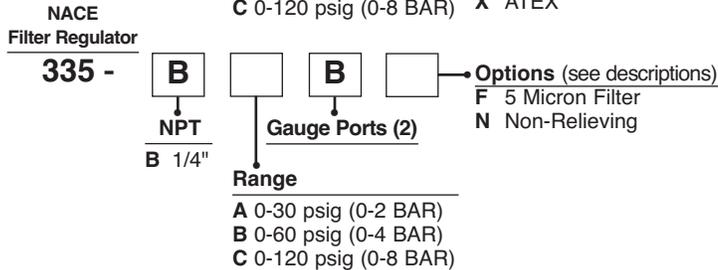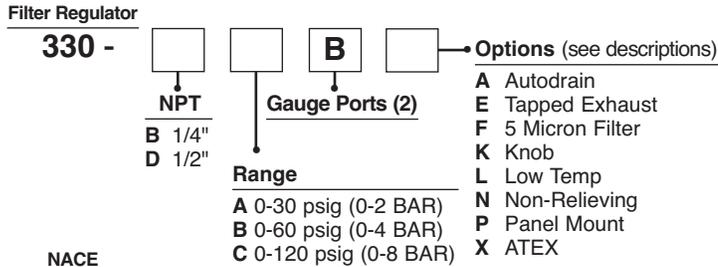

Options Add proper letter at end of model number.

- A** - Automatic Drain (Type 330 only): Float operated drain with 1/8" NPT connection. Maximum 150 psig supply pressure
- E** - Tapped Exhaust: Allows captured exhaust. 1/4" NPT
- F** - 5 Micron Filter: Standard 40 micron filter is replaced with 5 micron filter for more complete air filtration (available for Type-330 only)
- K** - Knob: Hand wheel to replace square head adjust screw
- L** - Low Temperature: Range -40°F to 125°F (-40°C to 51°C)
- N** - Nonrelieving: For constant flow or downstream pressure relief applications
- X** - ATEX 94/9/EC

Accessories

Mounting Bracket: P/N 446-707-028

Gauges: 1/4" NPT back-mount, 2" face, Dual Scale

0-15 psi (0-1 BAR)	P/N 446-725-003
0-30 psi (0-2 BAR)	P/N 446-725-004
0-60 psi (0-4 BAR)	P/N 446-725-001
0-160 psi (0-10 BAR)	P/N 446-725-002


Warranty

ControlAir, Inc. products are warranted to be free from defects in materials and workmanship for a period of eighteen months from the date of sale, provided said products are used according to ControlAir, Inc. recommended usages. ControlAir, Inc.'s liability is limited to the repair, purchase price refund, or replacement in kind, at ControlAir, Inc.'s sole option, of any products proved defective. ControlAir, Inc. reserves the right to discontinue manufacture of any products or change products materials, designs or specifications without notice. Note: ControlAir does not assume responsibility for the selection, use, or maintenance of any product. Responsibility for the proper selection, use, and maintenance of any ControlAir product remains solely with the purchaser and end user.



PRINCIPLES OF OPERATION - TYPE 330/335/340

Turning the adjusting screw changes the force exerted by the range spring on the diaphragm assembly. In equilibrium of set pressure, the force exerted by the range spring is balanced by the force from the output pressure acting underneath the diaphragm assembly. An unbalanced state between the output pressure and the set pressure causes a corresponding reaction in the diaphragm and supply valve assemblies. If the output pressure rises above the set pressure, an upward force is exerted on the diaphragm assembly causing the relief seat to lift and open. Excess pressure is vented to atmosphere until equilibrium is reached. If the output pressure drops below the set pressure the unbalanced force of the range spring causes a downward force on the diaphragm assembly. The supply valve then opens until the pressure builds up once more to the equilibrium condition. Under forward flow conditions, the range spring force is balanced by the diaphragm pressure force, with the supply valve open just enough to maintain the required equilibrium pressure. When high flow occurs, a specially designed aspirator helps maintain downstream pressure and compensates for droop.

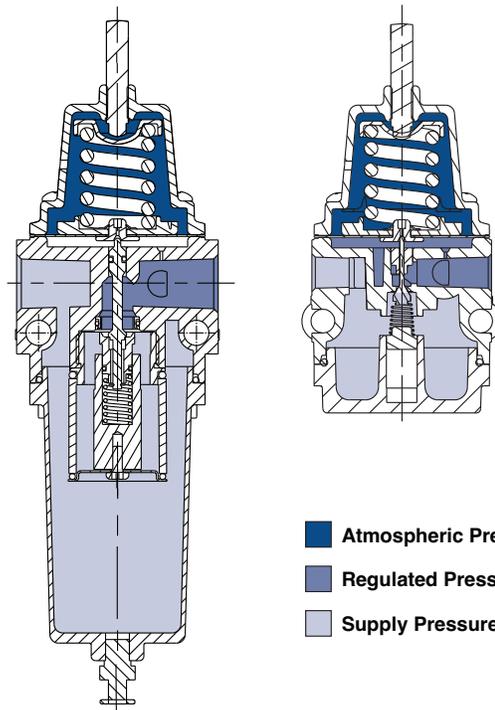

- Atmospheric Pressure
- Regulated Pressure
- Supply Pressure



8 Columbia Drive / Amherst, NH 03031 USA
 Website: www.controlair.com
 Email: sales@controlair.com
 603-886-9400 FAX 603-889-1844

An ISO-9001:2008 Certified Company