

"Apollo" Valves

EXP. NO.	SCALE: 2:1	DRN: GPT	DATE: 11/16/93	CHKD: WGH	APP'D: GDG	NO. I-3964-00	REV. K
NAME: INSTRUCTIONS,INSTALL,37-200 SER					UNSPECIFIED TOLERANCES: RADIUS = .03 MAX. Decimal: BREAK SHARP EDGES .005 - .015 .X = ± .03 MACH. FINISH = 125 Ra .XX = ± .015 ALL DIMENSIONS ARE IN INCHES, .XXX = ± .005 UNLESS OTHERWISE NOTED. ANGULAR: ± ½°		
MAT'L: 2-3/4" X 4-1/4" 20LB. BOND,BLACK TEXT ON WHITE							

NOTE: This drawing and the subject matter disclosed therein is the property of Conbraco Industries, Inc. and is not to be copied, used, appropriated or disclosed to others without the expressed written permission of Conbraco Industries, Inc.

REV.	CHANGE DESCRIPTION	ECN NO.	BY	DATE
K	UPDATED PROP 65 WARNING LABEL AND LF WARNING	M16975	DRP	06/18/18


MODEL VR (37-200 SERIES)

IMPORTANT

This valve is designed for the following service applications in accordance with "ANSI Z21.22 Relief Valves and Automatic Gas Shutoff devices" and "CSA 4.4" for hot water supply systems

INSTALLATION INSTRUCTIONS

1. Be sure all pipe connections are clean and free of debris.
2. Install threaded end of valve directly into tank or proper pipe connection. **NO VALVE IS TO BE PLACED BETWEEN THE RELIEF VALVE AND THE TANK.**
3. System pressure should not exceed 200 psi.

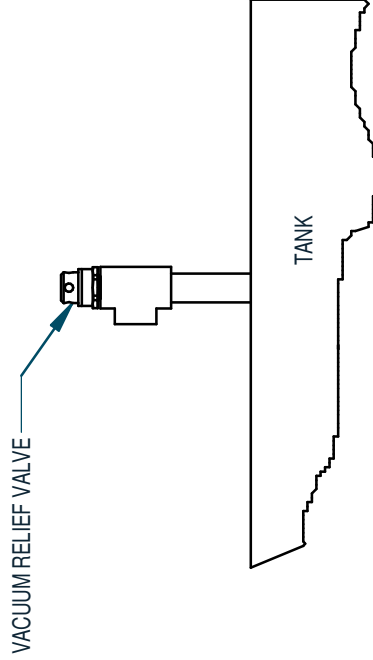


CONBRACO Industries nor its agents assume any liability for valves improperly installed or maintained.



CALIFORNIA PROP 65: WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FOR NON-LEAD FREE VALVES, it is illegal to use this product in the United States for potable water services (water intended for human consumption).

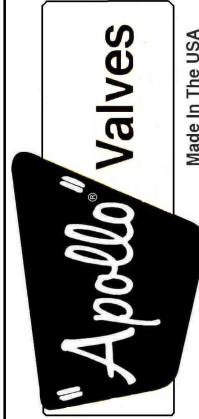

Made in The USA

