# DIN ELECTRICAL CONNECTORS




- Spade connector to fit standardized three-pin molded coils:
  - Size 22 connector with 11mm (0.43in) between contacts: EN 175301-803, industry standard form B, for coil types CM5, CM22, C22A, EMX and BMX
  - Size 30 connector with 18mm (0.71in) between contacts: ISO 4400/EN 175301-803 form A, for coil types CM6, CMXX, CM12, CM25, C25A, CM30, CM40, ANX, AMX, JMX, FNX and FMX
- The connectors are available in two versions: standard rotatable version with or without integrated visual LED indicator and electrical protection, or version with non-rotatable 3-core molded-in cable, 2m (78.7in) long
- The standard connector with 18mm contacts is provided with a removable lid allowing access to the wiring for easy checking of power supply without unplugging the connector and without interrupting operation of the solenoid valve

Connector S	Max. Operating	
11mm between contacts (0.43in)	18mm between contacts (0.71in)	Temperature
EN 175301-803 industry standard form B	ISO 4400/EN 175301-803, form A	-40 °C to 80 °C (-40 °F to 176 °F), -40 °C to 125 °C (-40 °F to 257 °F) with silicone seal [version with molded-in cable -5 °C to 70 °C (23 °F to 158 °F)]


Construction	
Standard version	PA (polyamide), glass-fiber reinforced
Enclosure with LED and protection	PA
Enclosure with PVC cable	PA (polyamide), glass-fiber reinforced
Seals	NBR [option for 18mm contacts: VMQ (silicone)]

Electrical Characteristics					
	11mm between contacts (0.43in)	18mm between contacts (0.71in)			
Number of contacts	2 + common ground	2 + common ground			
Contact resistance	≤ 4m Ω	≤ 4m Ω			
Connector	Spade plug	Spade plug			
Electrical safety	IEC 335	IEC 335			
Electrical enclosure protection	IP65 (EN 60529)	IP65 (EN 60529)			
Number of wires (with cable)	3	3			







**Rotatable Connector** 



Standard Rotatable Connector with Power Supply Control

### **LED Indicator and Electrical Protection Diagrams**





VDR Varistor absorbing the self-inductance of the coil
RC circuit absorbing the self-inductance of the coil
LED Green light-emitting diode, bidirectional, signalling the presence of voltage across the coil terminals

Specifications											
	Cable	Cabl	e O.D.	Wire Cross-	Max.		Catalog Number				
Description	Length	11mm	18mm	Section		е Туре	11mm	18n	nm		
	m (inches)	mm (i	nches)	mm <sup>2</sup>	V		NBR	NBR	VMQ*		
Rotatable Connector											
Standard, Without LED Indicator	-	6 to 8 (0.24 to 0.31)	6 to 10 (0.24 to 0.40)	1.5	250	01-02	290414-001	290411-001	88122625		
					12		-	88122611	-		
					24		290415-024	290412-024	-		
With Integrated LED Indicator and Electrical Protection	-	6 to 8 (0.24 to 0.31)	8 to 10 (0.31 to 0.40)	1.5	48	01-02	-	290412-048	-		
and Electrical Peteotici							115		290415-120	290412-120	-
					230		290415-240	290412-240	-		
Non-rotatable Connector with	Cable										
Without LED Indicator	2 (78.7)	-		1.5	250	03-04	88122413	88122612	-		


<sup>\*</sup> For use within class H temperature limits





### **Dimensions: mm (inches)**


## **Dimensional Drawings**













Type 02


18mm (0.71in) Lead Wires ISO 4400/EN 175301-803, form A




#### 290411-001 88122625








290412-024/048/120/240








Type 03

11mm (0.43in) Lead Wires EN 175301-803,

industry standard form B IP65 (non-rotatable terminal holder)

88122413



- Type 04
- 18mm (0.71in) Lead Wires ISO 4400/EN 175301-803, form A IP65 (non-rotatable terminal holder)
- 88122612
- 30 (1.18) 2m (78.7 in.) 30 (1.18) ,18 (0.71) 35 (1.38) ₩<u>\_</u>M3 44 (1.73) @
- Fastening screw/cover
- (2` Cover seal
- (3) Enclosure

**88122602/625**: 2 seals for cable dia. 8 to 10mm (4a) or cable dia. 6 to 8mm (4b) 88122611/603/604/605/608: 1 seal for cable dia. 8 to 10mm (4a) 88122404/405/406/407/410: 1 seal for cable dia. 6 to 8mm (4b)

- Stuffing box washer and nut
- (6) Cable connection terminal
- $\overline{7}$ Terminal holder
- (8) Connector seal

#### Installation

 The connectors can be mounted in any position without affecting operation

Sizes 03 and 04					
brown wire	terminal 1 (+)				
blue wire	terminal 2 (-)				
green/yellow wire	ground				

Tuno	L	Weight	1 (kg)
Туре	m (inches)	without LED indicator	with LED indicator
01	-	0.025	0.025
02	-	0.030	0.032
03	2 (78.7)	0.150	-
04	2 (78.7)	0.155	-

<sup>&</sup>lt;sup>1</sup> Including seals and screws

# DIN ELECTRICAL CONNECTORS




- Spade connector to fit standardized three-pin molded coils:
  - EN 175301-803, industry standard form C (9.4mm), for coil type CM15 (202 Series), DMX and 302, 630, 519, 520, 521 and 578 Series (MEGA)
  - EN 175301-803, form C (8mm), for 302, 630 and 202 Series
- The connectors are available in three versions: standard rotatable version, or version with non-rotatable 3-core molded-in cable, 2m (78.7in) or 5m (196.9in) long, with or without integrated visual LED indicator and electrical protection




Connector Sp	Connector Specification		
9.4mm between contacts (0.37in)	8mm between contacts (0.31in)	Max. Operating Temperature	
EN 175301-803 industry standard form C	EN 175301-803, form C	-25 °C to 60 °C (-13 °F to 140 °F), [version with molded-in cable]	

Construction	
Standard version	PA, glass-fiber reinforced
Enclosure with LED and protection	PA or PP
Enclosure with PVC cable	PP, glass-fiber reinforced
Seals	NBR




Rotatable Connector 9.4mm or 8mm

Electrical Characteristics					
	9.4mm between contacts (0.37in)	8mm between contacts (0.31in)			
Number of contacts	2 + common ground	2 + common ground			
Contact resistance	≤ 4m Ω	≤ 4m Ω			
Connector	Spade plug	Spade plug			
Electrical safety	IEC 335	IEC 335			
Electrical enclosure protection	IP65 (EN 60529)	IP65 (EN 60529)			
Number of wires (with cable)	3	3			



Non-rotatable Connector with Cable

#### **LED Indicator and Electrical Protection Diagram**



VDR Varistor absorbing the self-inductance of the coil
LED Green light-emitting diode, bidirectional, signalling
the presence of voltage across the coil terminals


Specifications							
Description	Cable Length	Cable O.D.	Wire Cross- Section	Max. Voltage	Туре	Catalog Number	
	m (inches)	mm (inches)	mm <sup>2</sup>	٧		9.4mm	8mm
Rotatable Connector							
Standard, Without LED Indicator	-	4 to 6 (0.16 to 0.24)	0.6	250 V	01 - 02	290417-001	88130211
Non-rotatable Connector with Cable							
Without LED Indicator	2 (78.7)	-	0.6	250 V	03	272852-004	*
With Integrated LED Indicator and Electrical Protection	2 (78.7)		0.6	24.17	24 V 04	-	-
and Electrical Protection	5 (196.9)	_	0.6	24 V		88143593	-


<sup>\*</sup> Contact us



### **Dimensions: mm (inches)**

## **Dimensional Drawings**

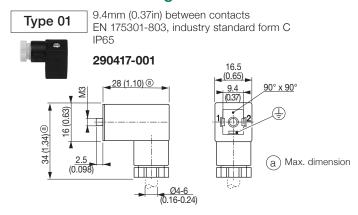

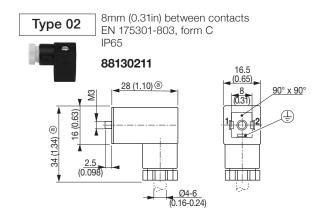

Type 03


Lead wires, without LED indicator

EN 175301-803, industry standard form C (9.4mm) IP65 (non-rotatable terminal holder)


2/5m (78.7/196.9 in.)

#### 272852-004

35 (1.38) @

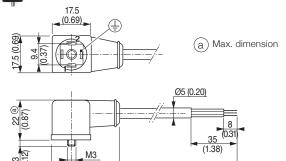

88130211-88143581



- Fastening screw/cover
- (2) Enclosure
- (3) Seal for cable diameter 4 to 6mm
- (4) Stuffing box washer and nut
- (5) Connector seal
- Terminal holder
- Cable connection terminal

Sizes 03 and 04				
brown wire	terminal 1 (+)			
blue wire	terminal 2 (-)			
green/yellow wire	ground			

	L	Weight <sup>1</sup> kg		
Type	m (inches)	without LED indicator	with LED indicator	
01-02	-	0.015	-	
03	2 (78.7)	0.100	-	

<sup>&</sup>lt;sup>1</sup> Including seals and screws

### **Options**

• Connectors with cable 5m (196.9in) long available on request

#### Installation

• The connectors can be mounted in any position without affecting operation

# POWER-SAVE CONNECTORS



Once a DC-type solenoid valve is activated, only the holding current, which corresponds to 50% of the inrush voltage, is necessary to keep the valve in position. The power-save connector switches to holding voltage after approx. 70 ms (size 30) or 140 ms (size 22). The holding power is thereby reduced to a quarter of the inrush power. During power reduction, the valve's coil is piloted via PMW voltage pulses.


- The main advantages of a connector with voltage reduction are:
  - Power savings (lower current consumption)
  - Low heat development in the solenoid valve



Construction				
Enclosure	PA			

	Size 22	Size 30	
Input Voltage	12/24 VDC ± 10%	10 to 30 VDC	
Output Voltage	12 VDC ± 10%	6 to 30 VDC	
Power Rating	Max. 12 W	Max. 30 W	
Connector	Spade plug	Spade plug	
Electrical Safety	Industry standard, form B	ISO 4400/EN 175301-803, form A	
Number of Contacts	2 + 1 common ground	2 + 1 common ground	
Electrical Enclosure Protection	IP65	IP65	
Cable Diameter	6 to 8mm (0.24in to 0.31in)	6 to 8mm (0.24in to 0.31in)	
LED Green	Solenoid valve actuation	Solenoid valve actuation	
LED Red	-	Overcurrent or overvoltage	
Voltage Reduction	After 140ms	After 70ms	
PWM Frequency	7 KHz	50 KHz	

voltago i loddotion		7 11.61 7 611.16					
PWM Frequency 7 KHz			50 KHz	50 KHz			
Specifications							
Description		Size	Input Voltage	Catalog Number			
	ge reduction	22	24 VDC ± 10%	88100934			
Power-save connector with voltage re			12 VDC ± 10%	88100944			
		00	401 001/00	00400045			






### **Dimensions: mm (inches)**


## **Dimensional Drawings**

Size 22

11mm (0.43in) between contacts




Size 33 | 18mm (0.71in) between contacts

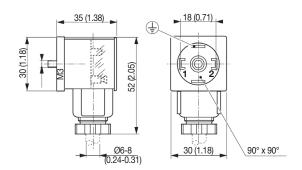

## **Electrical Connection**

Size 22

11mm (0.43in) between contacts



Screw terminals: up to 1mm<sup>2</sup> cable


- + Pilot voltage + (12/24 V)
- Pilot voltage (GND)
- Ground terminal, straight through



- 1 Valve voltage +
- 2 Valve voltage -
- 3 Ground terminal (PE)

Size 33 18

18mm (0.71in) between contacts

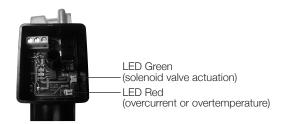

Screw terminals: up to 1mm<sup>2</sup> cable

- + Pilot voltage + (10-30 V)
- Pilot voltage (GND)
- Ground terminal (PE)



- 1 Valve voltage +
- 2 Valve voltage -
- (3) Ground terminal (PE)